


M.E. DEPT.  
MILWAUKEE R.R.  
DATE 5-2-67

Cascade Rail Foundation milweciinc.org

REV.

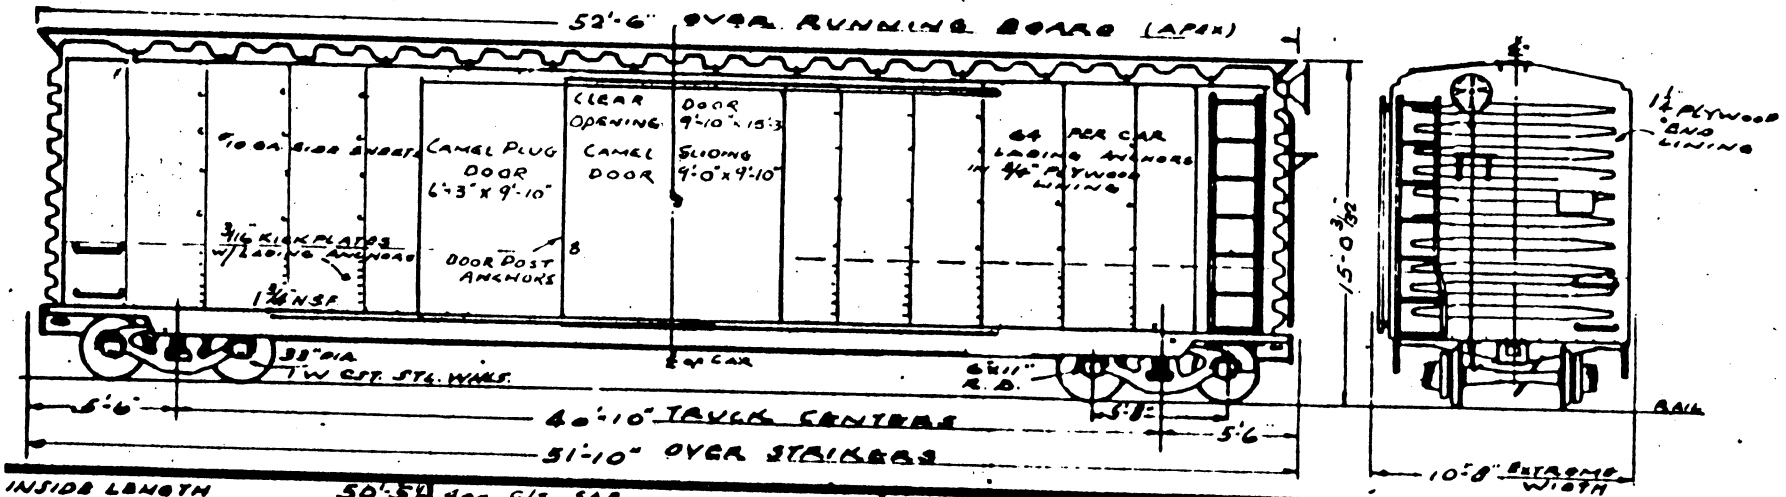

INSIDE LENGTH 50'-5 1/2"  
INSIDE WIDTH 9'-4 1/8"  
INSIDE HEIGHT @ CENTER 11'-2 3/8"  
INSIDE HEIGHT @ BAYS 10'-6"  
WIDTH OVER SIDE SHEETS 9'-11 7/16"  
WIDTH OVER EAVES-UPPER 9'-5 7/8"  
WIDTH OVER EAVES-LOWER 9'-11 1/8"  
WIDTH OVER SIDE SILLS 9'-11 1/8"  
HEIGHT RAIL TO FLOOR 3'-7 7/8"  
HEIGHT RAIL TO EAVES UPPER 14'-1 7/8"  
HEIGHT RAIL TO EAVES LOWER 13'-11 1/2"  
WIDTH OVER SIDE LADDER TREADS 10'-7 1/16"

400 C/S SAB  
100 C/S ELCON NAT'L.  
TRUCKS-BARBER STABILIZED  
S 2 A 2 1/2" SPRING TRAVEL  
NARROW PEDESTAL  
CAR# 12699  
HYDRA BUFF E-12-2  
A.O.S. TRUCK M.T.D. BRAKE  
ROLLER BEARINGS  
12500-12989 - 'TIMKEN'  
12990-12999 - 'BRANCO'

NOM. CAPY 154,000  
AXLE CAPY 220,000  
LT. WT. 25,900  
LIMIT LOAD 154,100  
CU. CAPY 4920+

BUILT 1962 PULLMAN STD  
MICH. CITY, INDIANA  
LOT 8684

PS 1 To Ton  
50'-5" Box  
12500-12999

"XM"

SERIES  
12500-12999