


ORIGINAL COPY

M. E. DEPT.
MILWAUKEE R. R.
DATE 5-3-67

Cascade Rail Foundation milwelectric.org

REV

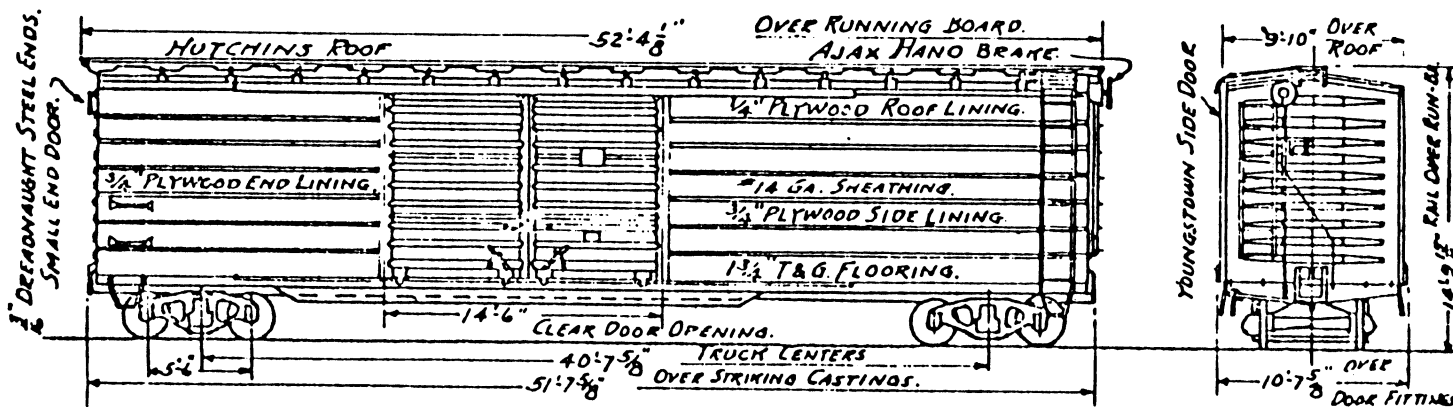

GENERAL DIMENSIONS:-

LENGTH INSIDE	50'-6"	WIDTH OVER ROOF	9'-10"
WIDTH INSIDE	9'-0"	WIDTH OVER DOOR FIXTURES	10'-7 5/8"
HEIGHT INSIDE - CENTER	10'-9 3/8"	LENGTH OVER ENDS (CORNER)	50'-7 7/8"
HEIGHT INSIDE - SIDE	10'-4"	LENGTH BETWEEN TRUCK CTRS.	40'-7 5/8"
HEIGHT - RAIL TO EAVES	13'-11 1/16"	LENGTH OVER STRIKERS	51'-7 5/8"
HEIGHT RAIL TO RUN. BD.	14'-9 15/16"	SMALL END DOOR 18 1/2" WIDE	16" HIGH.
HEIGHT RAIL TO FLOOR	13'-6 1/2"	AIR BRAKE	A. B.
HEIGHT OF SIDE DOOR OPENING	9'-6"	BARBER STABILIZED TRUCK	
HEIGHT OF SIDE DOOR OPEN. CLEAR	9'-3 3/8"	COUPLER - TYPE "E"	6 1/4" X 8"
WIDTH SIDE DOOR OPEN	14'-11 1/8"	DRAWING LIST	E-5330

MATERIAL - HIGH TENSILE STEEL.
 BUILT - MILWAUKEE - 1937.
 CUBIC CAPY. - 7184 CU. FT. 4696
 NOMINAL CAPY. - 110000 LBS.
 AXLE CAPY. - 177,000 LBS.
 LIGHT WEIGHT. - 48,600 LBS. 56500"
 LIMIT LOAD - 728,400 LBS. / 20500"
 DRAFT GEAR 13500 - 13749 EDGEMATER B-320
 DRAFT GEAR 13750 - 13899 HADON-6000 203
 50'-6" AUTOMOBILE CAR.
 (No 13500-13999. OLD NUMBERS)
 13000-13499

XP
"XAM"

A.F.E. 75730 - DF. 1 - 9 BELT-SIDE LINING REMOVED - METAL FLOOR PLATES 15375-15423
 APPLIED - AUXILIARY SIDE DOOR CLOSED. F-1-B-2947 - REMOVE
 EQUIPMENT, 15384-402-403-407 TO 410.
 SERIES
 16658-16668