


ORIGINAL COPY

M. E. DEPT.
MILWAUKEE R. R.
DATE 5-3-47

Cascade Rail Foundation milwelectric.org

REV.

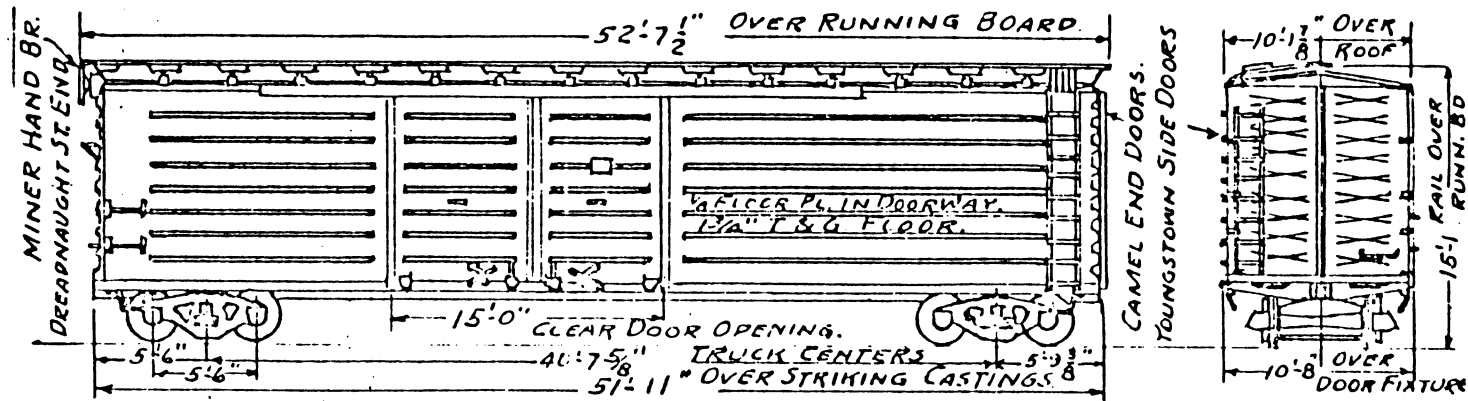

GENERAL DIMENSIONS.

LENGTH INSIDE ----- 50'-6"
 WIDTH INSIDE ----- 9'-6"
 INSIDE HEIGHT (AT CENTER) 11'-0 1/4"
 INSIDE HEIGHT (AT SIDE) ----- 10'-9"
 HEIGHT RAIL TO EAVES (UPPER) 14'-4 13/32"
 HEIGHT RAIL TO EAVES (LOWER) 14'-1 25/32"
 HEIGHT RAIL TO FLOOR ----- 3'-7"
 SIDE DOOR OPENING. 9'-5 1/2" X 15'-0"
 END DOOR OPENING 9'-6" X 10'-4 5/8" HIGH
 WIDTH OVER LADDERS ----- 10'-7 5/8"
 WIDTH OVER UPPER EAVES ----- 9'-8 3/4"
 WIDTH OVER LOWER EAVES ----- 10'-1 7/8"

AIR BRAKE ----- A-B.
 BARBER STABILIZED TRUCKS 5'-4 1/2"
 COUPLER - ROTARY - 6 1/4" X 8"
 BUILT - MILWAUKEE - 1947.
 DRAWING LIST. ----- E-9280
 GENL. PLAN. ----- A-4288.

CUBIC CAPY. ----- 5,157 CU. FT.
 NOMINAL CAPY. ----- 11,000 LBS.
 AXLE CAPY. ----- 177,000 LBS.
 LIGHT WEIGHT ----- 52,100 LBS 56,000*
 LIMIT LOAD. ----- 124,900 LBS 121,000*

AUTOMOBILE CAR.
WITH LARGE END DOORS.
NO 15500-15749.

" XM "

A.F.E. 2440-96 - SERIES 15750 TO 15809 - A.F.E. 2470-96 SERIES 15750-15839
 3810 TO 839. NEW SUPERIOR DOORS - STENCILED COGIT REFLECTIVE SERIES
 PAINT - END DOORS (CLOSED) - FLOORS COMB. WOOD AND STEEL. ----- 15750-15749