


M. E. DEPT.
MILWAUKEE R. R.
DATE 5-3-67

Cascade Rail Foundation milvelectnc.org

REV.

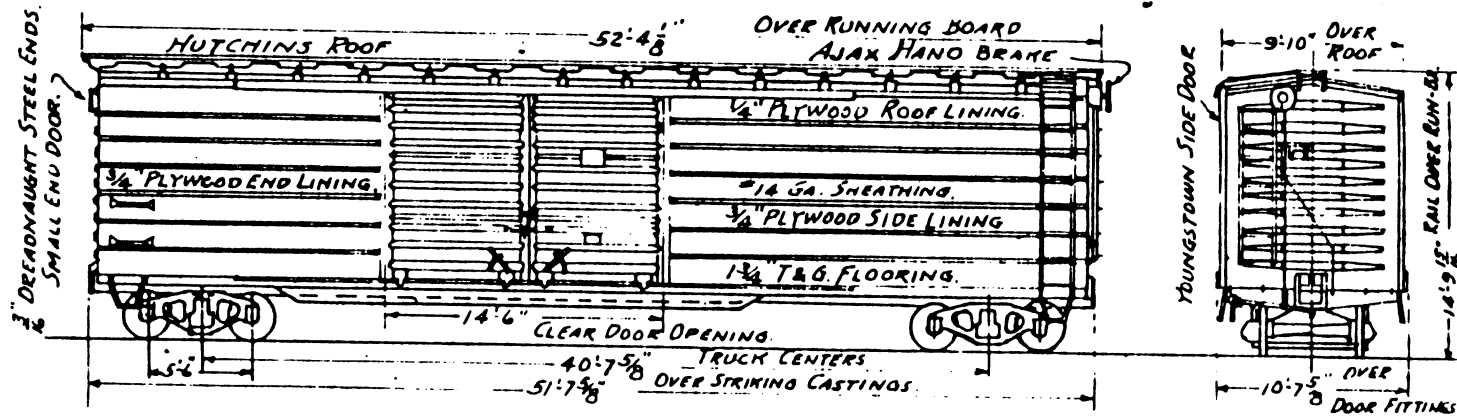

GENERAL DIMENSIONS:

LENGTH INSIDE	50'-6"	WIDTH OVER ROOF	9'-10"
WIDTH INSIDE	9'-2"	WIDTH OVER DOOR FIXTURES	10'-7 5/8"
HEIGHT INSIDE - CENTER	10'-9 3/8"	LENGTH OVER ENDS (CORNER)	50'-7 5/8"
HEIGHT INSIDE - SIDE	10'-4"	LENGTH BETWEEN TRUCK CTRS.	40'-7 5/8"
HEIGHT - RAIL TO EAVES	13'-11 1/16"	LENGTH OVER STRIKERS	51'-7 5/8"
HEIGHT RAIL TO RUN. BD.	14'-9 15/16"	SMALL END DOOR 18 1/2" WIDE - 16" HIGH	
HEIGHT RAIL TO FLOOR	3'-6 1/8"	AIR BRAKE	A-B
HEIGHT OF SIDE DOOR OPENING	9'-6"	BARBER STABILIZED TRUCK	
HEIGHT OF SIDE DOOR OPEN. CLEAR	9'-3 3/8"	COUPLER - TYPE "E" 6 1/4" X 8"	
WIDTH SIDE DOOR OPEN. CLEAR	14'-11 3/8" CLEAR 14'-6"	DRAWING LIST	E-5330

MATERIAL - HIGH TENSILE STEEL.
 BUILT - MILWAUKEE - 1937
 CUBIC CAPY. - 4784 CU. FT.
 NOMINAL CAPY. - 110000 LBS.
 AXLE CAPY. - 177,000 LBS.
 LIGHT WEIGHT. - 48,600 LBS.
 LIMIT LOAD - 120,400 LBS.
 DRAFT GEAR 13500-13749 EGGEMETER B-320
 DRAFT GEAR 13750-13999 HAUGH-GOMD #203
 50'-6" AUTOMOBILE CAR.
 (No 13500-13999. OLD NUMBERS)

"XM"

SERIES
16658-16668