


ORIGINAL COPY

M. E. DEPT.
MILWAUKEE R.R.
DATE 5-3-67

Cascade Rail Foundation milwelectric.org

REV.

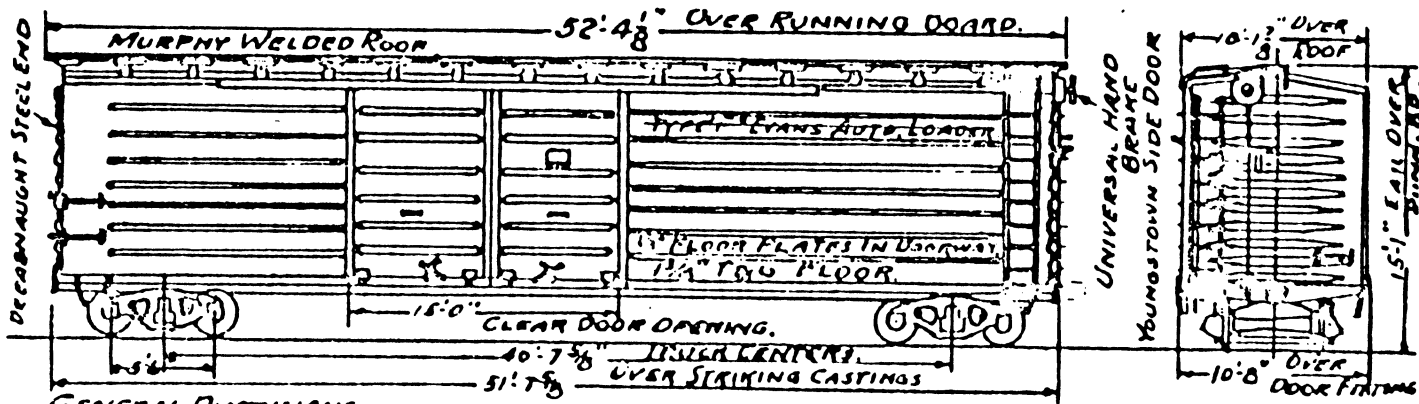

GENERAL DIMENSIONS.

LENGTH INSIDE (NO LINING) 50'-7 1/2"
 WIDTH INSIDE (NO LINING) 9'-2 9/16"
 HEIGHT INSIDE - CENTER 11'-2 3/16"
 HEIGHT INSIDE - SIDE 10'-9"
 HEIGHT RAIL TO EAVES (UPPER) 14'-4 1/8"
 HEIGHT RAIL TO EAVES (LOWER) 14'-1 1/8"
 HEIGHT RAIL TO RUNN. BD. 15'-1"
 HEIGHT RAIL TO FLOOR 3'-7"
 HEIGHT SIDE DOOR OPENING 9'-5 1/2"
 WIDTH OVER GRAB IRONS 10'-7 3/8"
 WIDTH OVER UPPER EAVES 9'-10 7/16"

AIR BRAKE ----- A-B
 BAMBER STABILIZED TRUCK
 COUPLER ----- ROTARY 6 1/2" x 8"

CUBIC CAPY ----- 5157 CU. FT.
 NOMINAL CAPY. ----- 11000 LBS.
 AXLE CAPY. ----- 17700 LBS.
 LIGHT WEIGHT ----- 52100 LBS. 59400*
 LIMIT LOAD ----- 72490 LBS. 117600*

BUILT - MILWAUKEE - 1947
 DRAWING LIST - E-9150
 GENL. PLAN. - A-4280

(AUTOMOBILE CAR. OLD
 NO 14000-14249. - NUMBERS)

XL
 X/A

A.F.E. 79192 - D.F. 1-14 BELT - R.F. 333 DRAFT GEAR

16301-16302
 SERIES
 11.1.19.11.1.77