

INDEX

SUBDIVISION	TERRITORY	PAGE
1st—Othello—Cle Elum	-----	2
2nd—Cle Elum—Maple Valley	-----	3
3rd—Black River—Tacoma	-----	4, 5
4th—Beverly Junction—Hanford	-----	6
5th—Cedar Falls—Everett	-----	6
6th—Bagley Junction—Enumclaw	-----	7
7th—Tacoma—Morton	-----	8, 9
8th—Park Junction—Ashford	-----	7
9th—Frederickson—Helsing Junction	-----	10
10th—Maytown—Raymond	-----	11
11th—Bellingham—Glacier	-----	12
12th—Hampton—Lynden	-----	12
13th—Discovery Junction—Disque	-----	13

TABLE OF TRAIN SPEEDS

Seconds per Mile	Miles per Hour	Seconds per Mile	Miles per Hour
36	100	59	61
37.9	95	60	60
40	90	61	59
42.4	85	62	58.1
45	80	63	57.1
46	78.3	64	56.3
47	76.6	65	55.4
48	75	66	54.5
49	73.5	67	53.7
50	72	68	52.9
51	70.6	69	52.2
52	69.2	70	51.4
53	67.9	75	48
54	66.7	80	45
55	65.5	85	42.4
56	64.3	90	40
57	63.2	100	36
58	62.1	120	30

PIONEER, INC., TACOMA—177119

CHICAGO, MILWAUKEE, ST. PAUL AND PACIFIC RAILROAD CO.

COAST DIVISION TIME TABLE NO. 15

Taking effect at 12:01 A. M.

Pacific Standard Time

SUNDAY, JUNE 2, 1946

For the government and information
of employes only

A. O. THOR

W. J. McMAHAN

Assistant Superintendents

N. A. MEYER,

Superintendent of Transportation.

J. L. BROWN,

General Superintendent of Transportation.

L. WYLIE,
Superintendent.

L. F. DONALD,
General Manager.

SECOND CLASS 263	FIRST CLASS 15	Capacity in cars		Telegraph calls	Distance from Cle Elum	Time Table No. 15 JUNE 2, 1946	Distance from Cle Elum	See Rule 6-A	Office open week days	FIRST CLASS 16	SECOND CLASS 264
		Sidings	Other tracks								
Daily	Daily					STATIONS				Daily	Daily
L 1.00AM	L 1.35AM		Yard	80	0.0	OTHELLO 5.5	98.9	BHKORTWX	Continuous	As 3.25AM	A 9.30PM
1.15	1.43	66			5.5	ANSON 3.7	93.4	P	No Office	3.05	9.00
1.25	1.47	115	11		9.2	TAUNTON 5.8	89.7	P	No Office	2.57	8.30
1.40	1.57	63	18	CF	15.0	CORFU 9.7	83.9	P	12.01AM to 9.00AM	2.45	8.00
¹⁵ 1.57	²⁶³ 2.10	110	10		24.7	SMYRNA 6.5	74.2	P	No Office	²⁶³ 2.30	7.30
¹⁶ 2.35	¹⁶ 2.20	80			31.2	JERICO 6.6	67.7	P	No Office	¹⁵ 2.20	7.00
3.30	2.32	115	Yard	BV	37.8	BEVERLY 1.0	61.1	BKOWXY	Continuous	2.08	6.35
					38.8	BEVERLY JCT. 2.7	60.1	JPX	No Office		
3.55	2.40		73		41.5	COHASSET PIT 2.5	57.4	P	No Office	2.00	6.20
4.10	2.45	110	3		44.0	DORIS 5.6	54.9	P	No Office	1.55	6.05
4.35	3.02	65	3		49.6	RYE 3.3	49.3	P	No Office	1.43	5.40
4.50	3.12	78			52.9	CHEVIOT 3.7	46.0	P	No Office	1.35	5.25
5.10	3.23	115	20	BX	56.6	BOYLSTON 5.5	42.3	P	8.00 PM to 5.00 AM Except Saturday	1.27	5.10
5.30	3.33	65			62.1	RENSLOW 2.8	36.8	P	No Office	1.16	4.45
5.45	3.39		17		64.9	EAST KITTITAS 2.3	34.0		No Office	1.10	4.30
6.15	3.44	110	85	KY	67.2	KITTITAS 2.9	31.7	KWXY	Continuous	1.06	4.20
			14		70.1	REGAL 3.5	28.8		No Office		
6.55	3.56	99	48	NB	73.6	ELLENSBURG 6.9	25.3		8.00 AM to 4.00 PM 11.00 PM to 7.00 AM	12.57	3.35
7.30	4.08	65	20		80.5	THORP 8.4	18.4	P	No Office	12.45	3.05
8.00	4.23	115	3		88.9	HORLICK 10.0	10.0	P	No Office	12.34	2.40
A 8.30AM	As 4.42AM		Yard	CM	98.9	CLE ELUM	0.0	BKRWX	Continuous	L 12.20AM	L 2.15PM

MAXIMUM SPEED PERMISSIBLE

	Pass. trains	Freight trains
Between Othello and 2½ mi. east of Beverly.....	65 mph.	50 mph.
Except around curves 2½ mi. west of Taunton to ½ mi. east of Corfu.....	35 mph.	25 mph.
Except over Bridge EE-260, 2 mi. east of Jericho.....	40 mph.	40 mph.
Between 2½ mi. east of Beverly and Beverly Station.....	25 mph.	25 mph.
Between Beverly and Boylston.....	30 mph.	18 mph.
Between Boylston and Kittitas.....	35 mph.	25 mph.
Between Kittitas and M.P. 2081, 5 mi. east of Cle Elum.....	60 mph.	40 mph.
Except over Bridge EE-384-B, 2½ mi. east of Thorp.....	35 mph.	35 mph.
Except on sharp curve between Tunnels 46 and 47, 3 mi. east of Horlick.....	35 mph.	25 mph.
Except ¼ mi. west of M.P. 2079 to M.P. 2081.....	40 mph.	30 mph.
Between M.P. 2081 and Cle Elum.....	70 mph.	50 mph.

EASTWARD TRAINS ARE SUPERIOR TO WESTWARD TRAINS OF THE SAME CLASS

INDUSTRIAL TRACKS NOT SHOWN AS STATIONS

Name	Miles	Direction	Station
Woldale	3.6	West	Ellensburg

Automatic Block System is in use between Othello and Cle Elum.

Mountain grade extends from Beverly Jct. to East switch at Kittitas.

The schedule stops shown for No. 15 at Kittitas, Ellensburg and Cle Elum apply to coach section only. When sleeper section includes a coach in service this train will stop at Ellensburg and Cle Elum to let off or pick up revenue coach passengers.

The schedule stops shown for No. 16 at Cle Elum, Ellensburg and Kittitas apply to coach section only. Stop for No. 16 at Beverly applies to both sleeper and coach sections.

The following automatic block signals are placed on left hand side of track as seen from approaching train: Signal 103-6, Eastward just west of Othello station. Westward stop signal just west of junction switch Beverly Jct.

At Beverly Jct. the normal position of junction switch is for the First Subdivision.

No. 15 will stop on signal at Corfu, Smyrna and Thorp to let off revenue passengers from Spokane and east, and pick up revenue passengers destined Seattle and west.

No. 16 will stop on signal at Thorp, Smyrna and Corfu to pick up revenue passengers destined Spokane and east, and let off revenue passengers from Seattle and west.

SECOND CLASS 263	FIRST CLASS 15	Capacity in cars		Telegraph calls	Distance from Cle Elum	Time Table No. 15			Distance from Seattle	See Rule 6-A	Office open week days	FIRST CLASS	SECOND CLASS
		Sidings	Other tracks			JUNE 2, 1946		16				264	
						STATIONS	Passenger	Time Freight					
Time Freight	Passenger											Passenger	Time Freight
Daily	Daily											Daily	Daily
L 9.00AM	L 4.42AM		Yard	CM	0 0	CLE ELUM	89.9	BKRWX	Continuous			As 12.20AM	A 2.00PM
9.35	5.00	110	34		11.6	EASTON	78.3	PVY	No Office			12.01AM	1.40
10.00	5.15	75	15		20.1	WHITTIER	69.8	P W 4 MI. WEST	No Office			11.44	1.20
10.25	5.32	115	106	HY	29.0	HYAK	60.9	PX	Continuous			11.27	1.00
10.40	5.39	86	15		31.6	ROCKDALE	58.8	PWX	No Office			11.20	12.45
11.00	5.53	66			36.7	BANDERA	53.2	P	No Office			11.09	12.25
11.20	6.07	62	12		42.0	GARCIA	47.9	PW	No Office			10.58	12 01PM
11.40	6.19	100	21		46.5	RAGNAR	43.4	P	No Office			10.48	11.40
12 30PM	6.31	118	395	MY	50.8	CEDAR FALLS	39.1	BJKOWXYZ	Continuous			10.40	11.15
12.44	6.38				54.8	BAGLEY JCT.	35.1	JP	No Office			10.33	9.58
12.48	6.39	65			55.6	BARNESTON	34.3	P	No Office			10.32	9.55
1.02	6.46	115			59.5	TRUDE	30.4	P	No Office			10.26	9.40
1.11	6.50		10		62.1	LANDSBURG	27.8	P	No Office			10.21	
1.19	6.54	63	18		64.4	NOBLE	25.5	P	No Office			10.17	9.20
			24		66.8	SLOANE	23.1		No Office				
A 1.30PM	A 7.00AM	84	14	MV	67.8	MAPLE VALLEY	22.1	JRVX	Continuous			L 10.12PM	L 9 10AM
2.30	7.20			RN	78.1	(N. P. CROSSING) RENTON	11.8					9.54	8.38
3.01	7.24		Yard	BI	80.5	BLACK RIVER (U. P. CROSSING)	9.4	LJRV		Via. P. C. R. R.		9.49	8.30
	7.32	80	336		84.8	VAN ASSELT	5.1	P				9.43	
	7.35				86.5	ARGO (U. P. CROSSING) (N. P. CROSSING)	3.4	I				9.40	
					38.2	SPOKANE ST. TOWER	0.7			Via. P. C. R. R.			
7 00PM					83.9	STACY ST. YARD	0.0	BKORTVWX					7 30AM
	8.00AM		Yard	OW	89.9	SEATTLE	0.0			Via U. P. R. R.		9 30PM	

MAXIMUM SPEED PERMISSIBLE

	Pass. trains	Freight trains
Between Cle Elum and M.P. 2099, 1½ ml. west of Easton	70 mph.	50 mph.
Except on first curve east and first curve west of Bridge FF-4, 4½ ml. west of Cle Elum	45 mph.	35 mph.
Between M.P. 2099 and ¼ ml. west of M.P. 2100, 2¼ ml. west of Easton	35 mph.	35 mph.
Between ¼ ml. west of M.P. 2100 and Hyak	40 mph.	30 mph.
Between Hyak and Rockdale	25 mph.	15 mph.
Between Rockdale and Cedar Falls	30 mph.	20 mph.
Between Cedar Falls and Maple Valley	55 mph.	40 mph.
Trains handling logs	10 mph.	30 mph.
Crossing Spokane Street Seattle	10 mph.	10 mph.

EASTWARD TRAINS ARE SUPERIOR TO WESTWARD TRAINS OF THE SAME CLASS

This time-table confers no authority between Maple Valley and Seattle. Between Maple Valley and Spokane St. tower, Pacific Coast time-table and rules govern. Between Argo and Union Passenger Station, Seattle, Union Pacific R. R. time-table and rules govern.

Automatic Block System is in use between Cle Elum and Maple Valley.

The following automatic block signals are placed on left side of track as seen from an approaching train: Signal 48.6 eastward between Ragnar and Garcia; Signal 43.7 westward between Garcia and Bandera; Signal 45.6 eastward at east headblock Garcia; Signal 36.0 eastward at west headblock Rockdale; eastward stop signal at east headblock Rockdale; Signal 26.0 eastward between Hyak and Whittier.

The schedule stops shown for Nos. 15 and 16 at Cle Elum and Cedar Falls apply to coach section only.

Mountain grade extends from Cedar Falls depot to one mile west of Hyak.

Headlight and marker lamps must be lighted while passing through Snoqualmie Tunnel No. 50 between Hyak and Rockdale.

No. 15 will stop on signal at Easton, Hyak, Rockdale and Maple Valley to let off revenue passengers from Spokane and east, or to pick up revenue passengers for Seattle and west. No. 15 will stop on signal at Maple Valley for express.

No. 16 will stop on signal at Maple Valley, Rockdale, Hyak, and Easton to pick up revenue passengers destined Spokane and east, or to let off revenue passengers from Seattle and west. No. 16 will stop on signal at Maple Valley for express.

THIRD SUBDIVISION EASTWARD

5

TimeTable No. 15 JUNE 2, 1946 STATIONS	Distance from Tacoma	See Rule 6-A	Office open week days	FIRST CLASS			SECOND CLASS					
				54	52	16	84	264	94	82		
				U. P. R. R. Passenger 401 Daily	U. P. R. R. Passenger 457 Daily	Passenger Daily	U. P. R. R. Time Freight 691 Daily	Time Freight Daily	Way Freight Daily Except Sunday	U. P. R. R. Time Freight 681 Daily		
SEATTLE	37.6		Via U. P. R. R.									
-0.7- STACY ST. YARD	36.6	BKORTV WXZ								12.50 PM		
-1.7- SPOKANE ST. TOWER	35.9		Via P. C. R. R.							12.45		
-1.7- ARGO (U. P. CROSSING) (N. P. CROSSING)	34.2		Via P. C. R. R.			8.30				12.38		
-4.3- VAN ASSELT	32.5	P				8.36				12.30		
-6.0- BLACK RIVER (N. P. CROSSING)	28.2	IJRVXY	Continuous	A ⁸¹ 6.20AM	A 1.41PM	A 8.29PM	A 4.10AM	A 7.57AM	A 12.01PM	A 10.30PM		
KENT 5.0	21.8	X	7.45 AM to 3.45 PM 11.00 PM to 7.00 AM	s 6.09	1.30	8.20	3.56	7.44	11.45	10.10		
AUBURN 4.0	16.8	X	Continuous	s 5.59	1.22	8.12	3.45	7.34	11.20	9.55		
BENROY 2.5	11.7	P	No Office	5.50	1.15	8.06	3.35	7.24	11.10	9.40		
SUMNER 1.7	9.2	WX	12.01 AM to 9.00 PM	s 5.44	1.11	s 8.02	3.28	⁸¹ 7.17	^{11.05} 9.30	9.30		
NORTH PUYALLUP 5.5	7.5		12.01 AM to 4.00 PM	s 5.39	1.07	7.58	3.23	7.12	¹⁵ 9.14	9.20		
TACOMA JCT. 2.0	2.0	JKRVX	Continuous	L 5.29AM	L 12.59PM	⁸³ 7.51	L 3.10AM	L 7.00AM	L 9.00AM	L 9.05PM		
TACOMA	0.0	BKR VX	Continuous			L 7.45PM						

MAXIMUM SPEED PERMISSIBLE

	Pass. trains	Freight trains
Between Black River and Tacoma Jct.-----	70 mph.	50 mph.
Except over N. P. R. R. crossing Black River-----	50 mph.	40 mph.
Except around east leg of wye, Black River-----	13 mph.	13 mph.
Except in City Limits Kent-----	40 mph.	40 mph.
Except in City Limits Auburn-----	40 mph.	40 mph.
Except around curve at Sumner-----	25 mph.	20 mph.
Between Tacoma Jct. and Tacoma-----	25 mph.	10 mph.
Except over east switch to Old Coach Yard-----	15 mph.	10 mph.
Except over C and D Streets Tacoma-----	10 mph.	10 mph.
Except eastward passenger trains over C and D Streets Tacoma-----	5 mph.	-----
Trains handling logs-----		30 mph.

EASTWARD TRAINS ARE SUPERIOR TO WESTWARD TRAINS OF THE SAME CLASS

RULES GOVERNING UNION PACIFIC RAILROAD CO. INTERLOCKING, BLACK RIVER

All movements are governed by Approach and Home signals located as follows:

FOR EASTWARD TRAINS:

Approach signal located.....1865 ft. west of crossing
Home signal located.....1006 ft. west of crossing
Train Order signal.....in front of interlocking tower

WHISTLE SIGNALS:

To Seattle via Pacific Coast R. R.1 long 1 short 1 long
To Seattle via Union Pacific R. R.1 long

RULES GOVERNING INTERLOCKED NORTHERN PACIFIC RY. CO. CROSSING, BLACK RIVER, OPERATED FROM UNION PACIFIC R. R. CO. INTERLOCKING, BLACK RIVER

All movements are governed by Approach and Home light signals located as follows:

FOR EASTWARD TRAINS:

Approach signal located.....5809 ft. west of crossing
Home signal located.....609 ft. west of crossing

FOR WESTWARD TRAINS FROM SEATTLE:

Approach signal located.....1570 ft. east of crossing
Home signal located.....717 ft. east of crossing

FOR WESTWARD TRAINS FROM BLACK RIVER YARD VIA WYE:

Approach signal located.....1251 ft. east of crossing
Home signal located.....715 ft. east of crossing

Trains approaching interlocking, desiring to use main track to Tacoma or Seattle will give one long sound of the whistle. Trains desiring to use wye, will give four long sounds of the whistle.

No. 16 will stop on signal at North Puyallup, Auburn or Kent for revenue passengers or express and will stop at these stations to leave revenue passengers.

No. 52 will stop on signal at Sumner and Auburn to receive or discharge revenue passengers to or from points beyond Tacoma or Seattle.

See additional Special Instructions for Third Subdivision on Page 4.

		Capacity in cars		Telegraph calls	Distance from Beverly Jct.	Time Table No. 15 JUNE 2, 1946 STATIONS	Distance from Hanford	See Rule 6-A	Office open week days		
		Sidings	Other tracks								
L	L				0.0	BEVERLY JUNCTION 4.0	20.79	JPX	No Office	A	A
		25			4.0	LEVERING 10.4	10.79	P	No Office		
		60			14.4	PRIEST RAPIDS 6.39	6.39	PWX	No Office		
A	A				20.79	HANFORD 3.5 HANFORD YARD	0.0	X PXY	No Office	L	L

MAXIMUM SPEED PERMISSIBLE

Between Beverly Jct. and Hanford Yard.....	30 mph.
Except from one mile west of Levering to four miles west of Priest Rapids	20 mph.

Trains need not obtain Clearance Form A at Beverly Jct., Hanford Yard or Hanford.

EASTWARD TRAINS ARE SUPERIOR TO WESTWARD TRAINS OF THE SAME CLASS

		Capacity in cars		Telegraph calls	Distance from Cedar Falls	Time Table No. 15 JUNE 2, 1946 STATIONS	Distance from Everett	See Rule 6-A	Office open week days		
		Sidings	Other tracks								
L			Yard	MY	0.0	CEDAR FALLS	54.6	BJKORWXYZ	Continuous	A	
					5.9	TANNER (N. P. CROSSING) 2.1	48.7	P	No Office		
		42	19		8.0	NORTH BEND 3.2	46.6	PWX	No Office		
		32		Q	11.2	SNOQUALMIE FALLS 1.1	43.4	X	8.00 AM to 5.00 PM		
		22			12.3	TOKUL 4.6	42.3		No Office		
		.11			16.9	FALL CITY 5.4	37.7		No Office		
		40	20	J	22.3	CARNATION 3.7	32.3	PW	7.15 AM to 4.15 PM		
		31	20		31.0	DUVALL 5.6	23.6	P	No Office		
			10		36.6	HIGH ROCK 3.6	18.0		No Office		
A					40.2	MONROE JCT. 0.3	14.4	JPYX	No Office	L	
				RO	40.5	MONROE 0.9	14.1				
					47.4	SNOHOMISH 5.8	7.2		Via G. N. Ry.		
					53.2	LOWELL 0.5	1.4	JVX			
		150			53.7	BELT YARD	1.9	JVXZ	Via N. P. Ry.		
					53.2	LOWELL 1.4	1.4	JVX			
A			Yard	RT	54.6	EVERETT	0.0	BKORTWX	8.00 AM to 5.00 PM	L	

MAXIMUM SPEED PERMISSIBLE

	Pass. trains	Freight trains
Between Cedar Falls and Snoqualmie Falls.....	30 mph.	30 mph.
Except 1½ mi. west of Cedar Falls to ½ mi. east of Tanner	15 mph.	15 mph.
Except within yard limits Snoqualmie Falls.....	6 mph.	6 mph.
Between Snoqualmie Falls and 2 mi. east of Carnation.....	15 mph.	15 mph.
Between 2 mi. east of Carnation and Monroe Jct.....	30 mph.	30 mph.
Except trains handling logs—Snoqualmie Falls to Carnation	15 mph.	15 mph.
Except on curve just west of M.P. 38 about 2 mi. east of Monroe Jct.....	25 mph.	25 mph.
Except over Bridge FF-962 between M.P. 39 and 40 about ½ mi. east of Monroe Jct.....	15 mph.	15 mph.

EASTWARD TRAINS ARE SUPERIOR TO WESTWARD TRAINS OF THE SAME CLASS

This time-table confers no authority between Monroe Jct. and Belt Yard. Between Monroe Jct. and Lowell, Great Northern Ry. Co. time-table and rules govern. Between Lowell and Belt Yard, Northern Pacific Ry. Co. time-table and rules govern.

INDUSTRIAL TRACKS NOT SHOWN AS STATIONS

Meadow Brook1.6 miles west of No. Bend
Stuart.....4.1 miles west of Carnation

WESTWARD

SIXTH SUBDIVISION

EASTWARD

7

		Capacity in cars		Telegraph calls	Distance from Bagley Jct.	Time Table No. 15 JUNE 2, 1946 STATIONS	Distance from Enumclaw	See Rule 6-A	Office open week days	
		Sidings	Other tracks							
L					0.0	BAGLEY JCT.				
			40		2.3	SELLECK (PACIFIC STATES LUMBER CO. CROSSING)	2.3 16.1	JPRX	No Office	A
					3.1	YANDELL			No Office	
					4.6	DURHAM			No Office	
					5.3	KANASKAT JCT.			No Office	
	19				7.4	PALMER			No Office	
		10			8.6	BAYNE JCT.		JPX	No Office	
		20			8.8	BAYNE		X	No Office	
					9.9	CUMBERLAND			No Office	
	15				10.7	NACO			No Office	
		62			12.7	VEAZIE			No Office	
A		90		CW	16.1	ENUMCLAW	0.0	BRWXY	6.15 AM to 2.15 PM	L

MAXIMUM SPEED PERMISSIBLE

Between Bagley Jct. and Bayne Jct.----- 15 mph.
Between Bayne Jct. and Enumclaw----- 25 mph.

Trains need not obtain clearance Form A at Bagley Jct., Kanaskat Jct. and Bayne Jct.

A derail is located 330 ft. west of junction switch at Bagley Jct.

At Bayne Jct. and Kanaskat Jct. normal position of junction switch is for joint track between Bayne Jct. and Kanaskat Jct.

EASTWARD TRAINS ARE SUPERIOR TO WESTWARD TRAINS OF THE SAME CLASS

WESTWARD

EIGHTH SUBDIVISION

EASTWARD

SECOND CLASS		Capacity in cars		Telegraph calls	Distance from Park Jct.	Time Table No. 15 JUNE 2, 1946 STATIONS	Distance from Ashford	See Rule 6-A	Office open week days	THIRD CLASS	
793		Sidings	Other tracks							794	
	Way Freight Daily Except Saturday				0.0	PARK JCT.	5.5	JPHY	No Office	A. 12.30 PM	
	L. 11.40 AM	41			3.5	NATIONAL	2.0	P	No Office	12.20	
	794 A. 11.59 AM		67		5.5	ASHFORD	0.0	PX	No Office	L. 12.10 PM	

MAXIMUM SPEED PERMISSIBLE

	Pass. trains	Freight trains
Between Park Jct. & Ashford-----	20 mph.	20 mph

Trains need not obtain Clearance Form A at Park Jct.

EASTWARD TRAINS ARE SUPERIOR TO WESTWARD TRAINS OF THE SAME CLASS

				SECOND CLASS			Capacity in cars		Telegraph calls	Distance from Tacoma	Time Table No. 15 JUNE 2, 1946
				865	791	863	Sidings	Other tracks			
				Time Freight Daily Except Sat.	Way Freight Daily Except Saturday	Time Freight Daily Except Sunday					
				L 9.30 ^{PM}	L 7.30 ^{AM}	L 12.01 ^{AM}		Yard	MA	0.0	TACOMA 3.3
				10.30	7.50	1.01	63	182		3.3	HILLSDALE 3.7
				⁸⁶² 10.50	8.15	1.15	86			7.0	ALLISON 4.2
				A 10.55 ^{PM}	8.27	A 1.30 ^{AM}	38	33	SJ	11.2	FREDERICKSON 6.6
					8.55		76			17.8	THRIFT 3.2
					9.08		88			21.0	TANWAX 2.0
					9.20					23.0	KAPOWSIN 8.6
					⁷⁹² 10.00 10.45		92			31.6	EATONVILLE JUNCTION 1.0
					10.30		76	30	V	32.6	EATONVILLE
					11.15		92	24		39.5	NEW RELIANCE 5.0
					11.30		17	30	BE	44.5	ELBE 2.4
					11.40		41			46.9	PARK JCT. 4.1
					A 12.45 ^{PM}		30	200	D	51.0	(Log. Co. Xing) MINERAL 4.2
							38	77		55.2	DIVIDE 5.2
								5		60.4	C & W SPUR 2.0
							25			62.4	COAL CANYON 2.1
							65	155	MN	64.5	MORTON

**EASTWARD TRAINS ARE SUPERIOR TO
WESTWARD TRAINS OF THE SAME CLASS**

Automatic Block System is in use between Hillsdale and junction switch near passenger station Tacoma.

Westward automatic stop signal located 40 ft. east of 7th Subdivision junction switch at Tacoma, is placed on left hand side of track as seen from an approaching train.

Rule 83B does not apply at Frederickson when operator is not on duty.

INDUSTRIAL TRACKS NOT SHOWN AS STATIONS

Name	Miles	Direction	Station
Midland	1.5	East	Allison
Columbia Powder Co.	0.7	West	Frederickson
H-P Spur	1.0	West	Park Jct.
Lindberg & Hobi Co.	1.1	West	Mineral
Carlson Lbr. Co.	1.8	West	Mineral
Nineteen Mile Creek	1.9	East	Coal Canyon
Watson and Atwood	1.2	East	Coal Canyon

At Eatonville Jct. and Park Jct. the normal position of junction switch is for the 7th Subdivision.

At Frederickson the normal position of junction switch is for the 9th Subdivision.

Junction switch to 7th Subdivision, located about 250 feet east of D Street, Tacoma, will be normally lined for 7th Subdivision.

MAXIMUM SPEED PERMISSIBLE

	Pass. trains	Freight trains
Between Tacoma and Hillsdale	15 mph.	15 mph.
Between Hillsdale and Park Jct.	30 mph.	30 mph.
Except eastward trains between New Reliance and Eatonville Jct.	20 mph.	20 mph.
Between Park Jct. and 2 mi. west of Divide	30 mph.	30 mph.
Except over Nisqually River Bridge	15 mph.	15 mph.
Except on curve 1 mi. east of Mineral	15 mph.	15 mph.
Between 2 mi. west of Divide and Coal Canyon	15 mph.	15 mph.
Between Coal Canyon and Morton	25 mph.	25 mph.
Trains handling logs		30 mph.

Time Table No. 15

JUNE 2, 1946

STATIONS	Distance from Morton	See Rule 6-A	Office open week days	SECOND CLASS			
				862	864	792	796
				Time Freight Daily Except Sunday	Time Freight Daily Except Mon.	Way Freight Daily Except Sunday	Way Freight Daily Except Sunday
TACOMA 3.3	64.5	BKRVX	Continuous	⁸⁶³ A 12.01AM	A 10 35AM	A 1.00PM	A 4.30AM
HILLSDALE 3.7	61.2	PX	No Office	11 25	10 10	12 40	4.00
ALLISON 4.2	57.5	PX W. 4 Miles W	No Office	⁸⁶⁵ 10.50	10.00	12 20	3.45
FREDERICKSON 6.6	53.3	JPRXY	8.00 PM to 5.00 AM Except Saturday	L 10.40PM	L 9.55AM	12.05PM	3.25
THRIFT 3.2	46.7	P	No Office			11 35	3.00
TANWAX 2.0	43.5		No Office			11 25	1.15
KAPOWSIN 8.6	41.5	PW	No Office			10 40	1.05
EATONVILLE JUNCTION 1.0	32.9	JPWXY	No Office			⁷⁹¹ 10.00 8.45	12.45AM
EATONVILLE	33.9	X	6.45 AM to 3.45 PM			9 45	
NEW RELIANCE 5.0	25.0	PX W 2.1 Mi. W	No Office			8 15	11.50
ELBE 2.4	20.0	X	8.00 AM to 5.00 PM			7 45	9.45
PARK JCT. 4.1 (Log. Co. Xing)	17.6	JPYX	No Office			7.20	9.30
MINERAL 4.2	13.5	BKMORWXY	Continuous			L 7 00AM	9.15
DIVIDE 5.2	9.3	W 4.9 West PX	No Office				8.15
C & W SPUR 2.0	4.1		No Office				
COAL CANYON 2.1	2.1		No Office				7 10
MORTON	0 0	BRXY	7.00 AM to 3.00 PM				L 7.00 PM

EASTWARD TRAINS ARE SUPERIOR TO
WESTWARD TRAINS OF THE SAME CLASS

Automatic Block System is in use between Hillsdale and junction switch near passenger station Tacoma.

Westward automatic stop signal located 40 ft. east of 7th Subdivision junction switch at Tacoma, is placed on left hand side of track as seen from an approaching train.

Rule 83B does not apply at Frederickson when operator is not on duty.

INDUSTRIAL TRACKS NOT SHOWN AS STATIONS

Name	Miles	Direction	Station
Midland	1.5	East	Allison
Columbia Powder Co.	0.7	West	Frederickson
H-P Spur	1.0	West	Park Jct.
Lindberg & Hohl Co.	1.1	West	Mineral
Carlson Lbr. Co.	1.3	West	Mineral
Nineteen Mile Creek	1.9	East	Coal Canyon
Watson and Atwood	1.2	East	Coal Canyon

At Eatonville Jct. and Park Jct. the normal position of junction switch is for the 7th Subdivision.

At Frederickson the normal position of junction switch is for the 9th Subdivision.

Junction switch to 7th Subdivision, located about 250 feet east of D Street, Tacoma, will be normally lined for 7th Subdivision.

MAXIMUM SPEED PERMISSIBLE

	Pass. trains	Freight trains
Between Tacoma and Hillsdale	15 mph.	15 mph.
Between Hillsdale and Park Jct.	30 mph.	30 mph.
Except eastward trains between New Reliance and Eatonville Jct.	20 mph.	20 mph.
Between Park Jct. and 2 mi. west of Divide	30 mph.	30 mph.
Except over Nisqually River Bridge	15 mph.	15 mph.
Except on curve 1 mi. east of Mineral	15 mph.	15 mph.
Between 2 mi. west of Divide and Coal Canyon	15 mph.	15 mph.
Between Coal Canyon and Morton	25 mph.	25 mph.
Trains handling logs	25 mph.	30 mph.

10 WESTWARD NINTH SUBDIVISION EASTWARD

SECOND CLASS						Time Table No. 15				SECOND CLASS		
865	863	Capacity in cars		Telegraph calls	Distance from Frederickson	JUNE 2, 1946		Distance from Hoquiam	See Rule 6-A	Office open week days	864	862
Time Freight Daily Except Sat.	Time Freight Daily Except Sunday	Sidings	Other tracks			STATIONS					Time Freight Daily Except Monday	Time Freight Daily Except Sunday
L 10.55PM	L 1.30AM	38	33	.SJ	0.0	FREDERICKSON	3.4	93.8	JPRXY	8.00 PM to 5.00 AM Except Saturday	A 9.55AM	A 10.40PM
11.05			8		3.4	LOVELAND	4.0	90.4		No Office		10.20
11.20	2.10	75			8.0	GREENDALE	7.8	85.8	PW	No Office	9.38	10.05
11.45	2.30	23	50		15.8	McKENNA	7.6	78.0	P	No Office	9.22	9.45
12.01AM	2.50	37			23.4	RAINIER	2.0	70.4	P	No Office	9.06	9.25
					26.3	(Weyerhaeuser Timber Co. Crossing)	2.6	67.5	M			
12.15	3.05		60		28.9	SKOOKUMCHUCK	1.1	64.9	JVX	No Office	8.55	9.05
12.20	3.10			JC	30.0	WESTERN JCT.	1.2	63.8	JVX	6.30 AM to 3.30 PM	8.50	9.03
12.30	3.15	34			31.2	OFFUTT LAKE	6.0	62.6		No Office	8.45	9.00
1.00	A 3.30AM	33	39		37.2	MAYTOWN	9.4	56.6	JPRWXY	No Office	L 8.35AM	8.30
1.30			7		46.6	ROCHESTER (N. P. Crossing)	1.0	47.2	P	No Office		8.05
A 1.40AM					48.5	HELISING JCT.	1.5	45.3	JRV	No Office		L 8.00PM
2.55					50.0	INDEPENDENCE	4.6	43.8				7.52
3.10					54.6	BALCH	3.0	39.2				7.40
3.25					58.5	CEDARVILLE	4.1	35.3				7.30
3.35					62.6	LANKNER	2.6	31.2				7.20
3.42					65.2	RONY	1.0	28.6				7.15
3.48					67.1	SAGINAW	1.7	26.7				7.10
3.55					68.8	SOUTH ELMA	3.4	25.0		Via U. P. R. R.		7.05
4.05					72.2	FULLER	6.5	21.6				6.50
4.30					78.7	SOUTH MONTESANO	1.4	15.1				6.30
4.36					80.1	MELBOURNE	2.8	13.7				6.14
4.45					82.9	PREACHER'S SLOUGH	3.6	10.9				5.50
					86.4	NORTH RIVER JCT.	1.1	7.4				
5.00					87.5	COSMOPOLIS	1.8	6.3				5.35
					89.3	SOUTH ABERDEEN	0.9	4.5				
5.15					90.2	ABERDEEN	3.0	3.6				5.20
5.45AM					93.8	HOQUIAM		0.0		Via N. P. Ry.		5.00PM

MAXIMUM SPEED PERMISSIBLE

	Pass. trains	Freight trains
Between Frederickson and Loveland.....	35 mph.	35 mph.
Between Loveland and Western Jct.....	30 mph.	30 mph.
Between Western Jct. and Maytown.....	35 mph.	35 mph.
Between Maytown and Helsing Jct.....	30 mph.	30 mph.
Trains handling logs		30 mph.

INDUSTRIAL TRACKS NOT SHOWN AS STATIONS

Name	Miles	Direction	Station
UPCO.....	2.8	West.....	Offutt Lake

EASTWARD TRAINS ARE SUPERIOR TO WESTWARD TRAINS OF THE SAME CLASS

This time-table confers no authority between Helsing Jct. and Hoquiam. Between Helsing Jct. and Aberdeen, Union Pacific Railroad Co. time-table and rules govern. Between Aberdeen and Hoquiam, Northern Pacific Railway Co. time-table and rules govern.

At Frederickson the normal position of junction switch is for the Ninth Subdivision.

Rule 83B does not apply at Frederickson when operator is not on duty.

Trains need not obtain Clearance Form A at Maytown.

At Maytown the normal position of junction switch is for the Tenth Subdivision.

At Helsing Jct. the normal position of junction switch is for the Union Pacific Railroad Co. track.

Trains need not obtain Clearance Form A at Helsing Jct.

WESTWARD

TENTH SUBDIVISION

EASTWARD

11

THIRD CLASS 963	SECOND CLASS 863	Capacity in cars		Telegraph calls	Distance from Maytown	Time Table No. 15 JUNE 2, 1946			Distance from Raymond	See Rule 6-A	Office open week days	SECOND CLASS	THIRD CLASS
		Sidings	Other tracks			864	964						
Way Freight Daily Except Sunday	Time Freight Daily Except Sunday					STATIONS						Time Freight Daily Except Monday	Way Freight Daily Except Sunday
	L 3.40AM	33	39		0.0	MAYTOWN		64.6	JPRWXY	No Office		A 8.35AM	
	4.05	54			7.4	ESSEX		57.2		No Office		8.15	
					12.4	(N. P. Crossing) (U. P. Crossing) BLAKESLEE JCT.	5.0	52.2	MX				
	4.30	40	36	CN	13.7	CENTRALIA	1.3	50.9	PXZ	6.30AM to 3.30 PM		8.00	
					17.0	(3 N. P. Crossings)	0.4	47.6	M				
L 4.30PM	4.50	57	100	CH	17.4	CHEHALIS	1.0	47.2	KPRVWX	6.30AM to 10.30 PM		7.45	As 3.20PM
4.35	A 5.30AM			JO	18.4	(N. P. Crossing) CHEHALIS JCT.	39.6	46.2	JMVX	8.00 AM to 5.00 PM	L 7.30AM		3.15
	9.00AM				58.0	LONGVIEW		0.0		Via N. P. Ry.		4.30AM	
					18.4	CHEHALIS JCT.	16.9	46.2		Via N. P. Ry.			
L 5.40PM					25.3	DRYAD JCT.	1.0	29.3	JRV	No Office			As 1.55PM
f 5.45		10			36.3	DOTY	13.7	23.3	P	No Office			f 1.50
f 6.30		13			50.0	MACPHALL	3.3	14.6	X	No Office			f 1.00
f 6.50		30			53.3	SUTICO	1.6	11.2		No Office			f 12.45
f 7.00					54.9	FIRDALE	0.9	9.7	PW	No Office			f 12.30
f 7.34			10		61.8	WILLAPA	2.8	2.8		No Office			f 12.10
As 7.55PM		19	140	RD	64.6	RAYMOND (N. P. Crossing)		0.0	BEORVWXY	8.00 AM to 5.00 PM		L 12.01PM	

MAXIMUM SPEED PERMISSIBLE

	Pass. trains	Freight trains
Between Maytown and M.P. 10, 2 ml. west of west switch, Essex	30 mph.	30 mph.
Between M.P. 10 and M.P. 16, 2 ml. west of Centralia	40 mph.	40 mph.
Except over Railroad crossings, Blakeslee Jct.	20 mph.	20 mph.
Between M.P. 16 and Chehalis Jct.	15 mph.	15 mph.
Except over Railroad crossings, Chehalis Jct.	10 mph.	10 mph.
Between Dryad Jct. and MacPhall	20 mph.	20 mph.
Between MacPhall and Firdale	15 mph.	15 mph.
Between Firdale and Raymond	20 mph.	20 mph.
Trains handling logs		30 mph.

INDUSTRIAL TRACKS NOT SHOWN AS STATIONS

Name	Miles	Direction	Station
Murnen	2.3	West	Doty
Hilda	5.2	West	Doty

EASTWARD TRAINS ARE SUPERIOR TO WESTWARD TRAINS OF THE SAME CLASS

This time-table confers no authority between Chehalis Jct. and Longview nor between Chehalis Jct. and Dryad Jct. Northern Pacific Railway Co.'s time-table and rules govern.

At Maytown the normal position of junction switch is for the Tenth Subdivision.

Trains need not obtain Clearance Form A at Maytown.

Nos. 864 and 963 carry passengers between Raymond and Chehalis.

Trains need not obtain clearance Form A at Dryad Jct.

Eastward C. M. St. P. & P. trains need not obtain Clearance Form A at Chehalis Jct. for movement on C. M. St. P. & P. tracks.

SECOND CLASS		Capacity in cars		Telegraph calls	Distance from Bellingham	Time Table No. 15 JUNE 2, 1946 STATIONS	Distance from Glacier	See Rule 6-A	Office open week days	THIRD CLASS	
97	Way Freight Daily Except Sunday	Sidings	Other tracks							98	Way Freight Daily Except Sunday
L	5.00AM		Yard	L	0.0	BELLINGHAM (3 G. N. Crossings)	4.0	46.8	BKMORTVWXZ	7.00 AM to 4.00 PM	A 2.15PM
	5.25	21			4.0	CORNWALL 7.4		42.8		No Office	1.55
	5.48	34			11.4	WAHL 1.5		35.4	P	No Office	1.20
	5.55		7		12.9	GOSHEN 4.1		33.9		No Office	12.55
	6.07	15			17.0	STRANDELL 0.8		29.8		No Office	12.35
	6.15		30		17.8	EVERSON 1.5		29.0	X	No Office	12.25
	6.30	13			19.3	HAMPTON 2.9		27.5	JPRXY	No Office	12.10PM
	6.40	16			22.2	CLEARBROOK 2.9		24.6		No Office	11.50
	6.50		Yard	S	25.1	SUMAS 1.0		21.7	BPVWXY	7.45 AM to 4.45 PM	11.40
					26.1	(N. P. Crossing) 5.8		20.7		No Office	
	7.25	17			31.9	HILLTOP 0.8		14.9	P	No Office	11.01
	7.30	15			32.7	COLUMBIA 0.7		14.1	P	No Office	10.55
	7.35				33.4	LIMESTONE JCT. 2.9		13.4	PY	No Office	10.45
	7.55	8			36.3	KENDALL 3.2		10.5		No Office	10.05
	8.25	12			39.5	MAPLE FALLS 7.3		7.8	P	No Office	9.55
A	9.15AM	25	55		46.8	GLACIER		0.0	PRY	No Office	L 9.30AM

MAXIMUM SPEED PERMISSIBLE

	Pass. trains	Freight trains
Between Bellingham and Glacier	25 mph.	25 mph.
Except on O.P.C. track between east wye switch and end of track Limestone Jct.	10 mph.	10 mph.
Except 1000 ft. west of Hampton to M.P. 20	10 mph.	10 mph.

A derail is located on main track west of west wye switch at Glacier.

All trains must stop before crossing Guide Meridian St. at Cornwall except westward trains may proceed at restricted speed if engineer deems it safe to do so.

EASTWARD TRAINS ARE SUPERIOR TO WESTWARD TRAINS OF THE SAME CLASS

INDUSTRIAL TRACKS NOT SHOWN AS STATIONS

Name	Miles	Direction	Station
Lind Spur	2.7	West	Bellingham.
Cement Spur	3.3	West	Bellingham.
Blair	1.8	East	Hilltop

Eastward trains will not be required to obtain a clearance Form A at Glacier. Westward trains will not be required to

INDUSTRIAL TRACKS NOT SHOWN AS STATIONS

Name	Miles	Direction	Station
Jacobs	0.33	East	Hilltop
Boulder Creek Spur	2.0	West	Maple Falls
Mt. Baker Mill Co.	1.8	East	Glacier

obtain a clearance Form A at Hampton.

WESTWARD

TWELFTH SUBDIVISION

EASTWARD

SECOND CLASS		Capacity in cars		Telegraph calls	Distance from Hampton	Time Table No. 15 JUNE 2, 1946 STATIONS	Distance from Lynden	See Rule 6-A	Office open week days	THIRD CLASS	
197	Way Freight Daily Except Sunday	Sidings	Other tracks							198	Way Freight Daily Except Sunday
L	6.30AM		20		0.0	HAMPTON 5.4	5.4	JPRXY	No Office	A 8.21AM	
A	6.50AM		Yard	A	5.4	LYNDEN	0.0	RY	8.00 AM to 8.00 PM	L 8.01AM	

MAXIMUM SPEED PERMISSIBLE

	Freight trains
Between Hampton & Lynden	20 mph.
Over Slade crossing 1.8 mi. east of Lynden	4 mph.

EASTWARD TRAINS ARE SUPERIOR TO WESTWARD TRAINS OF THE SAME CLASS

Trains need not obtain Clearance Form A at Hampton.

SECOND CLASS				Capacity in cars	Telegraph calls	Distance from Port Townsend	Time Table No. 15			Distance from Disque	See Rule 6-A	Office open week days	SECOND CLASS	
95	Way Freight Daily Except Sun.	Sidings	Other tracks				JUNE 2, 1946	STATIONS	96				Way Freight Daily Except Sun.	
														L 11.05PM
						0.0	PORT TOWNSEND	69.1	OWYX	8.00 AM to 5.00 PM	As 9.35PM			
		27				13.0	DISCOVERY JUNCTION	58.1	V	No Office		8.45PM		
			10			14.4	MAYNARD	54.7		No Office				
			10			20.4	GARDINER	48.7		No Office				
		22				25.7	BLYN	43.4		No Office				
	As 1.20	34				32.5	SEQUIM	36.6	W	8.00 AM to 5.00 PM	As 7.30			
		13				36.1	CARLSBORG	33.0	X	No Office				
		10				39.9	AGNEW	29.2		No Office				
			12			42.9	CRANE	26.2		No Office				
		27				48.4	ENNIS CREEK	20.7	X	No Office				
	As 2.30AM		Yard			50.8	PORT ANGELES	18.3	BKOPRWXYZ	8.00 AM to 5.00 PM	L 6.30PM			
		25				55.0	JORDAN	14.1		No Office				
		5				58.6	ELWHA	10.5		No Office				
			2			62.1	COVILL	7.0		No Office				
		26				67.2	JOYCE	1.9		No Office				
						69.1	DISQUE	0.0	V	No Office				

MAXIMUM SPEED PERMISSIBLE

	Pass. trains	Freight trains
Between Port Townsend and Discovery Jct.....	20 mph.	15 mph.
Between Discovery Jct. and Port Angeles.....	35 mph.	25 mph.
Except over Morse Creek Bridge at M.P. 45, 5¼ ml. each of Port Angeles.....	10 mph.	10 mph.
Except along waterfront east of Ennis Creek.....	10 mph.	10 mph.
Between Port Angeles and Disque.....	20 mph.	20 mph.
Trains handling logs.....	-----	20 mph.

EASTWARD TRAINS ARE SUPERIOR TO WESTWARD TRAINS OF THE SAME CLASS

INDUSTRIAL TRACKS NOT SHOWN AS STATIONS

Name	Miles	Direction	Station
Edus	2.0	West	Port Angeles

Between Port Townsend & Discovery Jct. C. M. St. P. & P. R. R. time-table and rules govern.

Trains need not obtain Clearance Form A at Port Townsend.


Trains must stop before crossing Laurel St. Port Angeles.

Between Port Angeles and Disque, train orders will be issued by Port Angeles Western Railway Company Train Dispatcher. CMS&P&P Railroad Company timetable and rules will govern.

YARD LIMITS AT

- Othello—Extend from 3496 ft. east of east switch to 5280 ft. west of west switch.
- Beverly and Beverly Jct.—Extend from 3700 ft. east of east switch Beverly to 245 ft. west of junction switch Beverly Jct. on First Subdivision, and 5000 ft. west of junction switch Beverly Jct. on Fourth Subdivision.
- Kittitas—Extend from 3005 ft. east of east switch to 2989 ft. west of west switch.
- Cle Elum—Extend from 2613 ft. east of east switch to 4314 ft. west of west switch.
- Hyak & Rockdale—Extend from 3069 ft. east of east switch Hyak to 103 ft. west of west portal of Snoqualmie Tunnel.
- Cedar Falls—Extend from 2670 ft. east of east switch to 3895 ft. west of west switch on 2nd subdivision, and 2900 ft. west of west switch of Log Loading track on 5th subdivision.
- Maple Valley—Extend from 3000 ft. east of east switch to Pacific Coast R. R. yard limits.
- Black River—Extend from 3063 ft. west of Northern Pacific Railway crossing to Pacific Coast R. R. and Union Pacific R. R. yard limits.
- Kent—Extend from 3000 ft. east of east switch to 1847 ft. west of west switch.
- Auburn—Extend from 3007 ft. east of east switch to 2600 ft. west of west switch connection to Government Yard.
- Sumner—Extend from 3088 ft. east of east switch to 2994 ft. west of west switch.
- Tacoma, Tacoma Jct. & Hillsdale—Extend from 3500 ft. east of east siding switch Tacoma Jct. to Tide Flats Yard, to end of track Tacoma Passenger station and to 4421 ft. west of west switch Hillsdale on 7th subdivision.
- Priest Rapids—Extend from 2000 ft. east of east switch to 2000 ft. west of west switch.
- Hanford—Extend from Hanford Station Sign (MP 20.79) to 3000 ft. west of west switch Hanford Yard.
- North Bend—Extend from east switch to 2000 ft. west of west switch.
- Snoqualmie Falls—Extend 3100 ft. east of east switch to 2692 ft. west of west switch.
- Monroe Jct.—Extend from 5300 ft. east of junction switch to Monroe Jct.
- Everett & Belt Yard—Extend from Lowell Jct. to end of track Everett, and Belt Yard N. P. Ry. connection to end of track.
- Bagley Jct.—Extend from Bagley Jct. switch to 800 ft. west of switch on 6th subdivision.
- Selleck—Extend from 2263 ft. east of east switch to 3120 ft. west of west switch.
- Bayne—Extend from 2774 ft. east of Occidental spur switch to 2627 ft. west of Bayne Mine switch.
- Enumclaw—Extend from 1288 ft. east of east wye switch to 2025 ft. west of west switch of Northern Pacific siding and to 666 ft. east of N. P. setout track on White River Lbr. Co. R. R.
- Allison—Extend from 972 ft. east of east switch to 1650 ft. west of west switch.
- Frederickson—Extend from 493 ft. east of east switch to 3250 ft. west of west switch on 7th subdivision, and 2672 ft. west of west switch on 9th subdivision.
- Eatonville Jct. and Eatonville—Extend from 2500 ft. east of east switch to 2500 ft. west of west switch Eatonville Jct., and to end of track west of Eatonville.
- New Reliance—Extend from 1000 ft. east of east switch to 150 ft. west to west switch.
- Elbe—Extend from 2640 ft. east of east switch to 2640 ft. west of west switch.
- Park Jct.—Extend from 3060 ft. east of east switch to 2860 ft. west of west switch on 7th Subdivision, and to 6468 ft. west of west switch on 8th subdivision.
- Mineral—Extend from 1438 ft. east of east switch to 1473 ft. west of west switch.
- Divide—Extend from 2500 ft. east of east switch to 2500 ft. west of west switch.
- Morton—Extend from 2578 ft. east of east switch to Kosmos Logging Co. interchange.
- Ashford—Extend from 242 ft. east of east switch to end of track.
- Skookumchuck and Western Jct.—Extend from 2000 ft. east of connection switch at Skookumchuck to 2012 ft. west of connection switch at Western Jct.
- Maytown—Extend from 2874 ft. east of east switch to 3279 ft. west of west switch on 9th subdivision, and to 1347 ft. west of west switch on 10th subdivision.
- Centralia & Blakeslee Jct.—Extend from 512 ft. east of N. P. Ry. crossing at Blakeslee Jct. to 3555 ft. west of west switch Centralia.
- Chehalis—Extend from 2975 ft. east of east switch to N. P. Ry. and C. C. & C. Ry. connection.
- Murnen—Extend from 700 ft. east of east switch to 1250 ft. west of west switch.
- Hilda—Extend from 2500 ft. east of east switch to 2500 ft. west of west switch.
- MacPhail—Extend from 2476 ft. east of east switch to 2000 ft. west of west switch.
- Raymond—Extend from 4230 ft. east of east switch to end of track.
- Port Angeles & Ennis Creek—Extend from 2500 ft. east of east switch at Ennis Creek to 1500 ft. west of Bayside yard switch.
- Carlsborg—Extend from 2500 ft. east of east switch to 2500 ft. west of west switch.
- Port Townsend—Extend from 2500 ft. west of west main line switch, east to end of yard tracks.
- Bellingham—Extend from 2000 ft. west of Cement Plant switch to end of tracks, including Lake Line, Bellingham.
- Everson & Hampton—Extend from 2000 ft. east of east switch Everson to 2008 ft. west of west wye switch Hampton.
- Sumas—Extend from 1954 ft. east of east wye switch to 2000 ft. west of west wye switch.

TONNAGE CHART

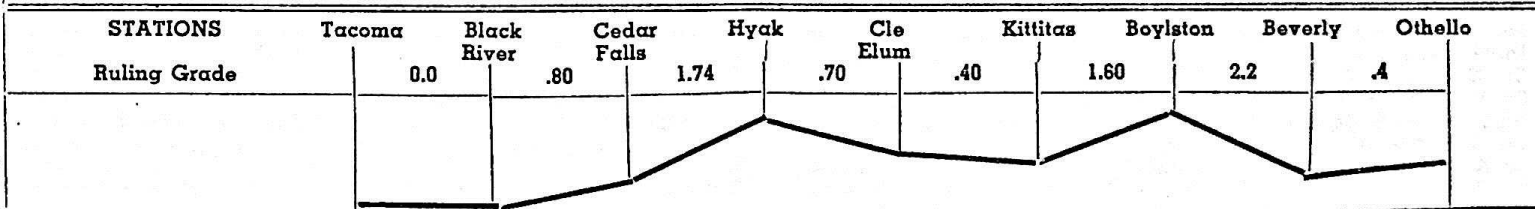

CLASS OF ENGINE	TONNAGE EASTWARD							
	L or E	L	L	L or E	L or E	L	L	L
F-5	3000	1500	700	CL	3500	740	CL	2600
C-2, C-3, C-5	3000	1500	700	CL	3500	840	CL	2600
L-2	4000	2000	950	CL	4500	960	CL	3000
S-1	4500	2300	975	CL	4500	1000	CL	3700
N-2	CL	2400	1150	CL	5000	1200	CL	3900
N-3	CL	2750	1300	CL	6000	1360	CL	4300
EP-2	3450	2000	1250	CL	4000	1300	1300 R	3200
EF-1	CL	4100	1550	CL	6000	1670	1670 R	5000
EF-2, EF3	CL	5500	2550	CL	7500	2500	2500 R	7000
DE—4-unit alone	CL	5500	2650	CL	CL	2900	1850 R	CL
DE—With Elec. Frt. Loco.	CL	5000	2300	CL	CL	2700	1800 R	CL
DE—2-unit alone	CL	2750	1325	CL	CL	1450	925 R	3500
DE—With Elec. Frt. Loco.	CL	2500	1150	CL	CL	1350	900 R	3000

CLASS OF ENGINE	TONNAGE WESTWARD							
	L or E	L or E	L	L or E	L or E	L	L	L or E
F-5	3000	CL	CL	1700	2000	CL	550	CL
C-2, C-3, C-5	3000	CL	CL	1700	2000	CL	550	CL
L-2	4000	CL	CL	2250	2600	CL	700	CL
S-1	4500	CL	CL	2600	3100	CL	700	CL
N-2	CL	CL	CL	2700	3300	CL	900	CL
N-3	CL	CL	CL	3100	3700	CL	1000	CL
EP-2	3450	CL	1250 R	3200	3700	1400 R	980	CL
EF-1	CL	CL	2800 R	4000	5000	3100 R	1200	CL
EF-2, EF-3	CL	CL	4000 R	5500	7000	4650 R	1800	CL
DE—4-unit alone	CL	CL	2700 R	6150	CL	2850 R	2050	CL
DE—With Elec. Frt. Loco.	CL	CL	2500 R	5500	CL	2500 R	1900	CL
DE—2-unit alone	CL	CL	1350 R	3075	4200	1425 R	1025	CL
DE—With Elec. Frt. Loco.	CL	CL	1250 R	2750	4000	1250 R	950	CL

Dispatcher may increase or decrease above tonnage ratings as may be necessary.

WEIGHT OF LOCOMOTIVE INCLUDING TENDER

L-2	216 tons	N-3	370 tons
L-3	252 tons	EF-1	288 tons
F-5	205 tons	EF-2	432 tons
F-3	196 tons	EF-3	408 tons
C-5	189 tons	EP-2	272 tons
C-3	185 tons	EP-3	310 tons
C-2	175 tons	K-1	182 tons
I-5	104 tons	S-1	400 tons
N-2	281 tons	DE-40 and DE-41	462 tons

EMERGENCY TELEPHONES

Baggage cars on coach sections of trains 15 and 16, and all motors are equipped with telephones. Also linen lockers on observation cars of sleeper sections.

On 2nd subdivision emergency telephones are located between Stations as follows:

In booth just west of bridge FF-16 one-half mile west of MP 2099.

In watchman's shack just east of Keechelus snow shed near MP 2112.

In watchman's shack just west of Windy Point one-half mile west of MP 2120.

In phone booth just west of Harris Creek and just east of MP 2125.

In phone booth just east of McClellans Butte and just east of MP 2127.

In watchman's shack west of Mine Creek just west of MP 2129.

In watchman's carbody east of Change Creek about one-half mile west of MP 2130.

On 4th subdivision, emergency telephones are located between stations as follows:

1 pole east of MP2.

2 poles east of MP9.

Carmans Bldg., Hanford Yard.

SURGEONS MILWAUKEE HOSPITAL ASSOCIATION

Dr. H. Eugene Allen.....	Chief Surgeon.....	Seattle
Dr. W. W. Hicks.....	Oculist.....	Ellensburg
Dr. H. Eugene Allen.....	District Surgeon.....	Seattle
Dr. W. F. Hoffman.....	Oculist.....	Seattle
Dr. E. DeMar Anderson.....	Oculist.....	Seattle
Dr. C. B. Ritchie.....	Acting District Surgeon.....	Tacoma
Dr. A. W. Howe.....	Oculist.....	Tacoma
Dr. S. S. Thordarson.....	Oculist.....	Tacoma
Dr. Robert F. Kaiser.....	Oculist.....	Bellingham
Dr. C. L. Hoettler.....	Oculist.....	Everett

HOSPITALS

Ellensburg.....	Ellensburg General Hospital
Cle Elum.....	Roslyn Cle Elum Hospital
Everett.....	Providence Hospital
Seattle.....	Providence Hospital
Port Angeles.....	Port Angeles General Hospital
Tacoma.....	St. Joseph's Hospital
Hoquiam.....	Hoquiam Hospital
Chehalis.....	St. Helen's Hospital
Bellingham.....	St. Lukes Hospital

Stretchers are located as follows: Othello, Beverly, Ellensburg, Cle Elum, Hyak, Cedar Falls, Tacoma, Morton, Mineral, Black River.

LOCATION	NAME	TITLE	OFFICE TELEPHONE	RESIDENCE TELEPHONE
Ellensburg	Dr. W. A. Taylor	Local Surgeon	Main 60	Main 160
Cle Elum	Dr. W. E. Smick	" "		
North Bend	Dr. R. J. Tipler	" "		
Snoqualmie	Dr. Samuel Max	" "		
Fall City	Dr. W. W. Cheney	" "	A2	A1
Monroe	Dr. Minard Allison	" "	Get thru Monroe Gen. Hospital	
Everett	Dr. A. H. Gunderson	" "		
Enumclaw	Dr. E. R. Tiffin	" "	163	175
Renton	Dr. H. H. Adams	" "		
Seattle	Dr. H. Eugene Allen	" "	Elliott 3037	Alder 1223
Seattle	Dr. I. M. Cohn	Asst. "	Elliott 3037	Hemlock 0402
Seattle	Dr. Wm. C. Speidel	Local "	Main 1291	RA. 0240
Kent	Dr. C. B. Hoffman	" "	53 W	53R
Auburn	Dr. Walter C. Ayles	" "	109-J	109-M
Auburn	Dr. John Darst	" "	199-J	354-M
Sumner	Dr. Chas. H. Denzler	" "	72	316 or 128
Tacoma	Dr. C. B. Ritchie	Local "	Broadway 1193	Broadway 3166
Tacoma	Dr. G. G. McBride	Asst. "	Broadway 1193	MAin 0684
Tacoma	Dr. B. N. Ootkin	" "	Broadway 1193	Dupont 32
So. Tacoma	Dr. A. G. Nace	" "	Garland 2182	Garland 1131
Eatonville	Dr. D. M. Nevitt	Local "	113	114
National	Dr. Hugh A. Larkin	" "		
Montescano	Dr. J. H. Fitz	" "	258	256-J
Cosmopolis	Dr. L. R. Lightfoot	" "	Aberdeen 1182	Aberdeen 1182
Aberdeen	Dr. J. B. Kinne	" "	553	777
Hoquiam	Dr. J. F. Macdonald	" "		
Chehalis	Dr. H. L. Pettit	" "	187-W	187-R
Raymond	Dr. M. L. Dumouchel	" "		
Longview	Dr. J. L. Norris	" "	LV23	LV580
Port Townsend	Dr. H. G. Plut	" "		
Port Angeles	Dr. R. S. Hamilton	" "	156-W	156-W
Bellingham	Dr. W. C. Moren	" "	844	845
Sumas	Dr. E. S. Sarvis	" "	371	372
Lynden	Dr. F. L. Wood	" "	1981	1982

SUNDAY & HOLIDAY HOURS AT STATIONS

Othello.....	Continuous	Sumner.....	12:01 AM to 9:00 PM
Corfu.....	Sundays—None	No. Puyallup.....	Sundays—None
	Holidays—12:01AM to 9:00 AM		Holidays—8:00 AM to 5:00 PM
Beverly.....	Continuous	Tacoma Jct.....	Continuous
Boylston.....	8:00 PM to 5:00 AM	Tacoma.....	Continuous
Kittitas.....	Continuous	Frederickson.....	8:00 PM to 5:00 AM
Ellensburg.....	Sundays—None	Eatonville.....	Sundays—None
	Holidays—8:00 AM to 4:00 PM		Holidays—8:45 AM to 3:45 PM
	11:00 PM to 7:00 AM	Elbe.....	Sundays—None
Cle Elum.....	Continuous		Holidays—8:00 AM to 5:00 PM
Hyak.....	Continuous	Mineral.....	Continuous
Cedar Falls.....	Continuous	Morton.....	Sundays—None
Enumclaw.....	Sundays—None		Holidays—7:00 AM to 3:00 PM
	Holidays—6:15 AM to 3:15 PM	Centralia.....	Sundays—None
Maple Valley.....	Continuous		Holidays—6:30 AM to 3:30 PM
Black River.....	Continuous	Chehalis.....	Sundays—None
Kent.....	Sundays—11:00 PM to 7:00 AM		Holidays—6:30 AM to 10:30 PM
	Holidays—7:45 AM to 3:45 PM	Raymond.....	Sundays—None
	11:00 PM to 7:00 AM		Holidays—8:00 AM to 5:00 PM
Auburn.....	Continuous		

Other Stations Closed

SPECIAL INSTRUCTIONS

ALL SUBDIVISIONS

G1 Engineers operating engines equipped with the oscillating emergency red headlight will be governed by the following:

When the air brakes are applied from any cause other than in normal operation by the engineer, or when it is found necessary to stop train due to some defect, or under circumstances which might cause a derailment and the fouling of adjacent main track, engineer must immediately display the oscillating red headlight.

Engineers on approaching trains will take notice and immediately bring train to a stop, and will not proceed until track is found to be safe and clear for their movement.

These instructions are applicable at all times, both day and night. The emergency headlight should not be used for any other purpose.

The operation and use of this device does not in any way relieve trainmen and enginemen from full compliance with Rules 99 and 102.

Emergency Red Rear End Lights. Trainmen on trains equipped with oscillating emergency red rear end lights must familiarize themselves with the location of the switches which control the lights and will be governed by the following:

The emergency red rear end light will be used on trains so equipped in the following manner:

To provide protection to trains on adjacent tracks as required by Rule 102.

To provide supplemental protection under Rule 99 in all circumstances where its use is necessary to stop following trains on one or more tracks.

A following train observing this emergency red light displayed must immediately reduce to restricted speed and be governed by instructions of flagman.

The use of this emergency red light does not in any way relieve the flagman from full compliance with Rules 99 and 102.

Portable emergency red lights must be removed before coupling onto the car.

G2 The Mars white light on engines so equipped shall be used at all times between the hours of sunset and sunrise, and during daylight hours on days that are dark, or during sleet, snow, fog or rain, such as would impair the vision of motorists and hinder them from observing approaching trains, except the light must be turned out when moving through certain portions of large terminals and yards where yard engines are employed, approaching junctions, or meeting points, or while standing at those points, and when approaching trains in the opposite direction on double or three or more tracks.

In case of failure of the regular headlight, the Mars white light should be used in stationary position as the headlight.

G3 Where Approach signals are used in connection with facing point switches or manual block signals, the switch or block signal will be considered as the Home signal.

G4 Employees are prohibited from:

Removing any of the appliances of engines or cars that will endanger the safety of themselves or others.

Standing on top of high cars while passing under bridges or through tunnels.

Getting on the end of an engine or of a car as it approaches them.

Going between or running ahead of moving cars to couple, uncouple, open, close, or arrange knuckles of couplers.

Working on the side of cars or trains where there are buildings, sheds, cattle chutes, or other projections.

Kicking or holding draw bar in position to make a coupling with an approaching car or engine.

Following other dangerous practices.

G5 When, for any reason, adjustment is necessary to a drawbar, knuckle pin, or locking block prior to making coupling or when coupling does not make, the engine or cars must be separated not less than 20 feet and action taken to prevent the cars from moving before going between the cars to make the adjustments.

G6 Whenever a car without a drawbar or draft timber is to be moved by a train or engine and it is necessary to chain the car to other cars or engines, employes are prohibited from going between such car and other cars or engines until the persons performing the work have a thorough understanding with the engineer and other members of the train crew. During the process of chaining up the car, the car itself must be properly secured while being chained to other cars, and if the car is to be chained to the engine, then the car must be secured and the brakes on the engine set to avoid a movement of any kind. The engineer must not release the brakes until he has received verbal information that all employes are out from between the cars or engines, and under no circumstances must employes again go between such car or cars and engines until the engineer and other members of the train crew have been notified and the car properly secured and the engine brake set.

G7 Employees must not handle or board cars or engines that bear BAD ORDER cards without first ascertaining the nature of the defect so that they may guard against injury.

G8 When descending the gangway steps, employes must face the engine.

G9 Employes should not step on track rails or other similar objects except when necessary in order to obtain secure footing.

G10 When run-ways, gang-planks or skids are used in handling freight to or from cars, they must be secured to prevent slipping.

G11 Lighting enginemen's torches by holding them in the fire box is hazardous and must not be permitted.

G12 Employees are prohibited from riding:

On engine footboards between engine and car when cars are being pushed.

On leading footboard while coupling engine to cars.

On engine pilot.

On deadwoods, drawbars, brake beams, journal boxes and brake wheels.

On ends of cars containing lading which may shift.

On engine pilot or footboards, sides or ends of cars, while going in or out of depressed tracks.

On forward footboard of engine in direction the engine is moving except in cases where operating conditions make it necessary for safety and then only one employe must ride on the footboard.

In the gangway of engines.

G13 Except in case of accident or when necessary to perform work on the engine that must be attended to immediately, engineers and firemen are prohibited from going out the side or front of cab of engines that are in motion. When necessary to go outside, extreme caution must be exercised to prevent injury.

G14 The use of gasoline stoves in Railroad Company's equipment or buildings is prohibited; the use of oil stoves other than modern kerosene stoves (preferably those bearing the Underwriter's label) is also prohibited.

This does not apply to U. S. Army Field Ranges when installed under the supervision of a U. S. Army commissioned officer and operated by his men.

G15 The provisions of Rule 815 also apply to transfer movements within yards.

G16 All 44-ton Diesel engines dead in freight trains must be handled at rear of train just ahead of the caboose and when a pusher engine is placed on the rear of the train, the 44-ton Diesel engine must be placed behind the pusher. When there is a 44-ton dead Diesel engine in the rear of the train, the train must not be pushed nor pulled from the rear, and the dead Diesel engine must not be handled in switching movements in conjunction with other cars.

The following equipment must not be towed or operated under its own power through water in excess of the maximum height of water above rail shown below. When towed or operated under own power through water of lesser depth than that shown below, a speed of three miles per hour must not be exceeded.

Diesel power units 600 and 1000 H.P. Switchers...4½ inches

All other Diesel engines and Gas-Electric motor cars3 inches

When operating through water under own power, controller should be in Series position.

G17 The following cars, loaded or empty, will be handled next ahead of the caboose giving preference in the order shown, except that at least one car must be handled between a flat car loaded with rails and the caboose:

Bad order cars.

Wood underframe flat cars.

Switch rear "S.R." cars.

G18 Unoccupied outfit cars of steel underframe or steel center sill construction when inspected and passed by a Car Department inspector, may be hauled in any part of the train.

G19 For the comfort of the passengers, the air-conditioning on our air-conditioned passenger trains should be kept operating as long as possible. When approaching stations where cars are to be picked up or set out between the engine and the rear car, the steam line must be blown out at the proper place and the steam shut off before the train stops. At the final terminal of the equipment, when no cars are to be set out between the engine and the rear car, the fireman will simply shut off the steam as soon as the train stops in the station.

G20 In case of heavy rain or violent windstorm, the operator must notify the section foreman.

G21 A yellow flag by day stencilled ELECTRIC CHARGE LINE and in addition, a yellow light by night, placed at one or both ends of a passenger car standing on a yard track, indicates that the battery of the car is connected to a charge line. When thus protected, it must not be coupled to or moved before the charge line has been removed. Other equipment must not be placed on the same track so as to intercept the view of the yellow signals without first notifying the workmen; in the absence of the workmen, the signals may be moved to the end of the equipment so placed to afford the necessary protection.

DEFINITIONS

G22 Centralized Traffic Control.—A block or a series of consecutive blocks, the signals of which, together with certain switches, are controlled from a central location.

Remote Control Interlocking.—A system of operating outlying signal appliances from a designated point.

C.T.C.—Abbreviation for Centralized Traffic Control.

CENTRALIZED TRAFFIC CONTROL

G23 (a) On portions of the railroad so specified in the timetable, trains will be governed by block signals whose indications will supersede the superiority of trains for both opposing and following movement on the same track.

(b) Except as affected by Special Instructions G23 (a), all block signal rules and operating rules remain in force.

(c) The movement of trains and engines will be supervised by the Train Dispatcher, who may also control the CTC. When the CTC is controlled by other than the Dispatcher, the Dispatcher will issue the necessary instructions to the operator at the control station, location of control station will be designated by special instructions.

(d) Train or engines must not enter CTC territory unless the governing signal displays a Proceed indication or unless authority is obtained from the authorized employe at the control station.

(e) In case of failure of a Stop signal, authority to proceed will be issued orally by the authorized employe at the control station.

(f) Trains or engines must not move beyond the limits of CTC territory without the proper authority including the information required by Rules S-83 and D-83.

(g) When the governing signal displays a Stop indication and the operator knows that the interlocked switches are in proper position and there are no opposing or conflicting train or engine movements involved, he will authorize the train or engine to proceed in the following form:

"You may proceed at restricted speed to the next signal."

If the operator does not positively know that there are no opposing or conflicting train or engine movements involved or that the interlocked switches are in proper position, he will issue authority to proceed in the following form:

"You may proceed under protection of a flagman to the first signal that displays a Proceed indication."

These instructions must be repeated by the conductor or engineer to insure correct understanding.

See Rule 663(A).

(h) When the governing signal displays a Stop indication for an approaching train or engine and the means of communication have failed, the train or engine may proceed at restricted speed, when preceded by a flagman, to the next signal that displays a Proceed indication, or to the next point of communication. Flagman must be sent far enough in advance to insure full protection.

(i) Where main track switches are not interlocked or equipped with electric locks, when a train or engine enters a siding or other track or makes a crossover

movement, the operator in charge must be notified when the movement is complete and the main track switches have been closed and locked. The switches must not be opened nor will the train or engine enter upon or foul the main track without first receiving authority from the operator.

- (j) A train or engine must not move in the opposite direction to that authorized by the governing signal without proper authority from the operator, unless preceded by a flagman sent far enough in advance to insure protection.
- (k) Instructions for the operation of the electric locks on hand operated switches are posted in telephone booths or on the inside of the door of the locks.
- (l) Dual Control switches are located at Interlocking in C.T.C. territory. See Rules 663 (A), 663 (B) and 663 (C).

GENERAL SPEED RESTRICTIONS

G24 When freight cars (except cars that are equipped for passenger train service) are hauled in a passenger train, the maximum speed of that train will be that prescribed for freight trains in that territory unless a different speed is authorized by bulletin or train order.

G25 Dead engines must not be hauled in trains without instructions from the Chief Dispatcher and must be accompanied by a competent rider, except a rider is not required for gas-electric or diesel engines.

Engines with side rods removed from one side only, must not be hauled in trains.

Dead engines equipped with wood underframe tenders, when hauled in trains, should be placed in the rear of the train just ahead of any Switch Rear cars.

G26 Gas-Electric motor cars should not be hauled dead in trains unless disabled. When necessary to haul such cars dead in freight trains, they should be hauled on the rear of short freight trains.

G27 Dead engines must not be hauled backward in trains if it can be prevented and then only at slow speed.

Conductors will notify engineers when one or more dead engines are to be hauled in trains and the conditions under which they are being handled, so that the speed may be regulated accordingly.

G28 When dead engines with side rods disconnected are hauled in trains there must be at least 8 cars between engines so hauled.

G29 Dead engines of Class K type or larger when hauled in trains should be placed approximately 10 cars from the road engine.

G30 Unless otherwise restricted, the following equipment must not be moved in excess of the maximum speeds shown below and further reduction must be made where conditions require:

Type of equipment	M.P.H.
Work trains with workmen or occupied outfit cars.....	25
Lidgerwood unloaders	15
Scale test cars	30
Class I engines	25
Passenger trains handled or helped by freight engines with single trucks.....	60
K-1 engines on passenger trains (but must not be used except in extreme emergency).....	45
L-2 and L-3 engines.....	50

Dead engines with side rods disconnected.....	15
Dead engines with side rods in position.....	25
Engines with side rods off and main rods connected when working steam, running light or in train.....	15
Engines (other than Mallet type) with side rods in position and one main rod removed, light or hauling cars	25
Mallet type engines working steam with one main rod removed	20
Diesel switchers, either dead in train or operating under their own power.....	35
All 44-ton Diesels:	
When dead in train.....	25
When under own power.....	30

G31 Unless otherwise specified, the speed of all trains or engines approaching interlocked railroad crossings must be reduced, and passenger trains must not exceed 45 miles per hour and other trains or engines 25 miles per hour when passing over such crossing. The stated speed must be further reduced where conditions require. This does not apply to railroad crossings protected by automatic signals or gates; trains and engines will approach such crossings at restricted speed and if proper Proceed indication is received, may pass over the crossing at the speed prescribed by Special instructions or bulletin.

The speed of all trains must not exceed 20 miles per hour while passing over railroad crossings protected by signals or gates unless otherwise specified.

G32 The speed of trains handled by Gas-Electric or other similar type power, when consisting of power unit only, must not exceed 10 miles per hour when approaching and passing over railroad crossings protected by automatic signals.

G33 That enginemen may have knowledge of the maximum permissible speed around curves and at points where normal authorized speed must be restricted, a yellow sign with the black letters R.S. and black figures and placed at an upward angle of 45° on the right hand side of the track, indicates that the permissible speed beginning 3000 ft. distant corresponds in miles per hour, to the figures shown. A yellow sign with the black letters R.S. and placed in a vertical position on the right hand side of the track, indicates that normal speed may be resumed.

These signs do not apply to trains which by time-table or other instructions, are restricted to a slower speed.

Where these signs have two sets of figures the outside figures apply to the movement of freight trains and those nearest the track apply to passenger trains.

G34 Spring switches:

Movement in facing point direction over a spring switch equipped with facing point lock may be made at normal speed. Movement in facing point direction over a spring switch not equipped with facing point lock must not exceed 25 miles per hour. If switch is lined for turnout, the allowable turnout speed must be observed.

Movement in trailing point direction over a spring switch on track for which the switch is lined may be made at normal speed.

Movement in trailing point direction which springs the switch points must not exceed 40 miles per hour.

If movement is through turnout the allowable turnout speed must be observed.

See Rules 520 to 525 inclusive.

X1 Trains handling steam derricks must not exceed the following speed limitations. The indicated maximum speeds must be further reduced on tangents and on curves where track is not in proper condition for the specified maximum speeds.

On Tangent Track

On Curves

First Subdivision	35 M.P.H.	25 M.P.H.
Second Subdivision	35 M.P.H.	20 M.P.H.
Third Subdivision	35 M.P.H.	25 M.P.H.
Fourth Subdivision	20 M.P.H.	15 M.P.H.
Fifth Subdivision	25 M.P.H.	15 M.P.H.
Sixth Subdivision	20 M.P.H.	10 M.P.H.
Seventh Subdivision	25 M.P.H.	20 M.P.H.
Eighth Subdivision	15 M.P.H.	10 M.P.H.
Ninth Subdivision	25 M.P.H.	20 M.P.H.
Tenth Subdivision	20 M.P.H.	15 M.P.H.
Eleventh Subdivision	15 M.P.H.	10 M.P.H.
Twelfth Subdivision	15 M.P.H.	10 M.P.H.
Thirteenth Subdivision	15 M.P.H.	10 M.P.H.

X2 Trains handling locomotive cranes, Jordan spreaders, shovels, pile drivers and ditching machines must not exceed speed limitations shown below. The indicated maximum speeds must be further reduced on tangents and on curves where track conditions do not justify the specified maximum speeds. When this work equipment is hauled in trains with the heavy end trailing, the speed must be further reduced to insure safe movement. Engine and train crews will make frequent observations of how these machines are riding.

On Tangent Track

On Curves

First Subdivision	35 M.P.H.	25 M.P.H.
Second Subdivision	35 M.P.H.	20 M.P.H.
Third Subdivision	35 M.P.H.	25 M.P.H.
Fourth Subdivision	20 M.P.H.	15 M.P.H.
Fifth Subdivision	20 M.P.H.	15 M.P.H.
Sixth Subdivision	20 M.P.H.	15 M.P.H.
Seventh Subdivision	20 M.P.H.	15 M.P.H.
Eighth Subdivision	15 M.P.H.	10 M.P.H.
Ninth Subdivision	20 M.P.H.	15 M.P.H.
Tenth Subdivision	20 M.P.H.	15 M.P.H.
Eleventh Subdivision	15 M.P.H.	10 M.P.H.
Twelfth Subdivision	15 M.P.H.	10 M.P.H.
Thirteenth Subdivision	15 M.P.H.	10 M.P.H.

X3 The speed of all trains or engines passing through turnouts must not exceed 13 miles per hour, except those turn-outs laid with long frogs and designated by Special Instructions or bulletin where the speed may be increased to 25 miles per hour, unless otherwise authorized.

Turnouts laid with long frogs are located at:

Station	Location
Maple Valley	Turnout from CMS&P to PC RR track.

X4 The speed of passenger trains when handled or helped by class N-3 engines must not exceed a maximum of 50 MPH.

Electric freight engines class EF-1, EF-2, or EF-3 must not exceed a speed of 45 MPH.

The speed of engines when running backward, either light or handling trains, must not exceed 25 miles per hour on tangent track and 20 miles per hour on curves.

ALL SUBDIVISIONS (Continued)

X6 Ten-minute fuses should be used on First, Second, and Third Subdivisions. Five-minute fuses should be used on all other Subdivisions except where operating under the rules of another railroad, requiring the use of ten-minute fuses.

X7 When any type of engine is used in helper service on passenger trains, the helper engine should be placed on the head end.

X8 When a train order office is closed during the period authorized by time-table or bulletin, the light in the train order signal will be extinguished.

X9 The Washington State Law governing movements of trains over railroad crossings at grade is as follows: "Trains shall stop at railroad crossings; all railroads and street railroads operating in this state shall cause their trains and cars to come to a full stop at a distance not greater than 500 ft. before crossing the tracks of another railroad crossing at grade, excepting at crossings where there are established signal towers and signalmen, interlocking plants or gates."

X10 The wires on the trolley and transmission line poles and supports carry high voltage. Contact with them either by person or equipment is liable to cause fatal injury or damage to property. **THEY MAY BE HANDLED ONLY BY THOSE WHO HAVE RECEIVED SPECIFIC AUTHORITY TO DO SO.**

If wires are found hanging down or any part of the trolley or transmission system deranged in such a way that a person might come in contact with the wires, the train dispatcher must be notified from the first point of communication.

If conditions are such that train or equipment is unable to pass without touching the wires, the train dispatcher must be notified and he will give necessary instructions.

In case of fire, extinguishers filled with carbon tetra-chloride only should be used if it is possible for the extinguishing liquid to come in contact with the wires.

In case of electric shock, resulting in apparent unconsciousness, application of the Prone Pressure Method of Resuscitation must proceed immediately; the knowledge of this method is required of all persons having duties within the electrified zone.

Freight trainmen will not be required to ride on top of train in electrified territory unless some real emergency condition exists, which, in the judgment of the conductor of the train, would require special attention from some member of the crew located on top of the car. These instructions are not to be considered as relieving trainmen from the necessity of getting on top of cars while switching operations are carried on when conditions require. However, in no case must trainmen get on top of cars where, on account of lack of clearance, there is danger of contacting any part of energized trolley system.

X11 At the following stations, the siding is also used as a house track; the train dispatcher need not be notified when cars are left on any of these sidings:

Fourth Subdivision.....	All Stations
Fifth Subdivision.....	Snoqualmie Falls, Tokul, Fall City, High Rock.
Sixth Subdivision.....	All Stations
Seventh Subdivision.....	Hillsdale, Frederickson, Elbe, Mineral, Morton.
Ninth Subdivision	McKenna, Offut Lake, Maytown.
Tenth Subdivision	All Stations
Eleventh Subdivision	All Stations
Twelfth Subdivision	All Stations
Thirteenth Subdivision	All Stations

X12 Operation of trains on mountain grades.—In addition to instructions contained in Air Brake and Signal Instruction Book, Form 2697 Revised, and approved April 1936, in which reference is made to paragraph numbers, the following will govern:

- (a) When there is no helper on the rear, the rear car must be one that is equipped with a good hand brake. Conductors are responsible for having trainmen properly stationed.
- (b) When a helper is used on the rear of a freight train, it must be in advance of boarding outfits, or cars of insufficient strength to safely resist the push of such helper.
- (c) Before commencing descent of grade from Hillsdale to Tacoma, a brake pipe test as per Rule 85-A must be made and all retainers must be turned up on eastward trains between Hillsdale and Tacoma as per Rule 90-A.
- (d) Before commencing descent of grade from New Reliance to Eatonville Junction, brake pipe test as per Rule 85-A must be made at New Reliance, and retainers must be turned up between New Reliance and Eatonville Junction as per Rule 90-A.
- (e) Before commencing descent of grade from MacPhail to Sutico, a sufficient number of retainers as determined by the conductor and engineer handling the train will be turned up to insure proper control of train speed. When engineer handling train is not familiar with this portion of the railroad, retainers must be turned up on all cars in the train.
- (f) Trainmen must watch closely for excessive heating of wheels and if any are found, the train must be brought to a stop and remain standing a sufficient length of time to allow the wheels to cool.
- (g) Paragraphs 97 and 128 (Inoperative Air Brakes) do not apply on mountain grade.
- (h) In electrified territory, the use of retaining valves and the testing of brakes before starting descent is not required providing there has been no change in position of hose cocks or double heading cocks since last test, EXCEPT when necessary to hold train with air brakes, in which case Rules 90-A, 139 and 140 will govern.
- (i) If regeneration fails descending a mountain grade, the train must be brought to a stop immediately as per Paragraph 140, all available retainers turned up and the brake pipe pressure fully restored before proceeding.
- (j) Engineers on freight trains must adjust the brake pipe feed valve pressure to 90 lbs. and have brake pipe charged to this pressure before commencing descent of mountain grade as per Rule 139. When there is no stop to be made at summit of mountain grade, engineers will adjust the brake pipe pressure to 90 lbs. four miles before reaching summit and trainmen on rear must note that pressure is being raised as indicated by caboose gauge as per Rule 104.
- (k) Whenever the engine handling a freight train is to be detached on a mountain grade, in addition to the use of hand brakes, the engineer on the helper engine will cut in the brake valve on his engine and keep the brake pipe fully charged. If two helpers are used, the one nearest the head end will cut in the brake valve on his engine. When the road engine is again attached to the train, the helper engineer will cut out the brake valve on his engine. Brake pipe test, as per Paragraphs 38 and 85-A, must be made before proceeding.
- (l) All trains descending the grade Boylston to Beverly and Rockdale to Cedar Falls with air brakes will stop at Rye and Garcia for inspection and to permit wheels to cool.
- (m) On descending grade when power goes off the line, train must be immediately brought to a stop. If power does

not come on the line again within one minute, engineer will notify trainmen who will immediately set enough hand brakes to alone hold the train. When power again comes on the line, engineer will recharge the brake pipe. Hand brakes must not be released until it is known that the air brake system has been fully recharged and the brakes operative.

- (n) All trains descending grade designated as mountain grade in the electrified territory with steam power or a power unit that will not regenerate, must turn up all available retainer valve handles just before passing over the summit of such grades and turn them down when foot of the grade has been reached. Rules 90-A and 139 governing.
- (o) With no helper at the rear of the train and a backing movement is made during the ascent of the grade, the brake pipe test, as per Paragraphs 38 and 85-A, must be made before the backing movement begins; the brake pipe pressure must be fully restored, a sufficient number of hand brakes applied on the rear of the train to properly control the slack, and a man stationed within reach of the Conductor's valve in order to stop the train promptly in case of emergency. If there is a helper in the train when the backing movement is to be made, the following will govern:

When the engineer on the road engine applies the brakes for brake-pipe test, he will cut out the brake valve on his engine and when the test has been completed, the engineer on the helper engine nearest the rear end will cut in the brake valve on his engine, fully recharge the brake pipe and control the air brakes during the backing movement; electric locomotives should be operated in series regeneration during the backing movement.

When the backing movement has been completed, the engineer on the helper engine will make a full service application of the train brakes and cut out the brake valve on his engine; the engineer on the road engine will cut in the brake valve on his engine and release the brakes. Trainmen must know that the brakes on the rear end of the train are released before the train starts.

X13 All spring switches except those indicated below are equipped with facing point locks, permitting maximum permissible speed in the territory involved while moving against the points. The speed must not exceed 25 MPH while moving against the points at the following spring switches.

Beverly.....	West siding switch
Boylston.....	East siding switch
Hyak.....	West siding switch
Rockdale.....	East siding switch
Ragnar.....	East siding switch
Ragnar.....	West siding switch
Cedar Falls.....	East siding switch
Black River.....	East switch of yard
Tacoma Junction.....	East end of double track
Frederickson.....	Junction switch
Maytown.....	Junction switch

Signals at spring switches at Tacoma Jct. (Tide Flats Line), Frederickson and Maytown indicate only the position of the spring switch.

X14 In placing passenger equipment with buffers in freight trains, such cars must not be placed between freight cars equipped with top pin lifter couplers unless the top pin lifter couplers have a direct connected uncoupling rod (not a chain) and provided the coupler heights are such that the buffer will not come in contact with the lock lifter or the uncoupling rod.

Express refrigerators or passenger cars equipped with U. C. brake equipment, when handled in freight trains, should be handled on the head end of the train.

Passenger cars equipped with L. N. brakes can be hauled in either head or rear end of freight trains.

SECOND SUBDIVISION

- X15 At Maple Valley, Black River and Tacoma Junction, trains other than those displaying signals for a following section, may register by register ticket.
- X16 Seattle water shed extends from one mile east of Cedar Falls station to Landsburg, and from Cedar Falls station to one mile west of station on 5th Subdivision. All toilets must be kept locked in trains in this district and in city limits Renton and Seattle. Refuse must not be thrown from private, dining, or other cars within these limits. Conductors will be held responsible for strict observance of this rule.
- X17 Trains handling logs loaded on flat cars without side stakes should not exceed a speed of 15 M.P.H. when operating over bridge FF-120, one mile west of Cedar Falls.

THIRD SUBDIVISION

- X18 In addition to those designated in time-table, standard clocks are located in Tide Flats Yard Office, Train Dispatcher's Office, Roundhouse Office, Tacoma, and Roundhouse Office, Seattle.
- X19 At Maple Valley, Black River and Tacoma Junction, trains other than those displaying signals for a following section, may register by register ticket.
- X20 At Tacoma, the normal position of the crossing gate over the N. P. crossing at Lincoln Avenue east of the roundhouse, is for movements on the CMStP&P tracks.
- X21 Manually controlled crossing signals are in use at D Street, Tacoma. Speed restriction over the crossing is 10 miles per hour. Movement on team track over D Street must be protected by a member of the crew taking a position on the crossing to warn highway traffic of approaching trains.
- X22 A manually controlled switch has been installed to permit the starting or stopping by hand of crossing signals at Pacific Highway crossing at Sumner.
- This switch consists of a knob, with a cover locked with a switch lock, on a box mounted on the instrument case for the crossing signals which is between the main track and siding and just east of the crossing. To operate, unlock cover, turn knob in one direction to stop signals, and opposite direction to start signals.
- X23 In Automatic Block Signal territory, Manual Block System Rules will apply when trains are run against the current of traffic.
- X24 Union Pacific Engines are prohibited from using the following tracks between Black River and Tacoma Jct.:

Sumner: Track over Stuck River Bridge serving Standard Brands, Fibreboard Products and Pacific Lumber Agency; house track and cannery track.

Kent: UP engines 2203 to 2207, inclusive, on spur track to Libby, McNeil & Libby Cannery and west end Howard Manufacturing Company track.

FIFTH SUBDIVISION

- X25 Class N-3 engines or doubleheaders must not exceed a speed of 15 miles per hour over bridge FF-856-B, one-half mile east of Carnation, nor over Bridge FF-962, one-fourth mile east of Monroe Jct.
- X26 Class L-2 engines must not be operated on Grange spur at Carnation, nor on west end of No. 2 track, Belt Yard, Everett.
- X27 Seattle water shed extends from one mile east of Cedar Falls station to Landsburg, and from Cedar Falls station to one mile west of station on 5th Subdivision. All toilets must be kept locked in trains in this district and in city limits Renton and Seattle. Refuse must not be thrown from private, dining, or other cars within these limits. Conductors will be held responsible for strict observance of this rule.

SIXTH SUBDIVISION

- X28 Between Bayne Jct. and Bagley Jct., via joint track, Northern Pacific wrecking derricks 41 to 47, inclusive, and engines heavier than NP class S-4 not permitted.
- Between Bayne Jct. and Enumclaw, Northern Pacific engines, classes A-2 to A-5, inclusive, and Z-5 to Z-8, inclusive, not permitted.
- X29 Trains handling logs will not cross on overhead bridge between Bayne Jct. and Kanaskat Jct. while a train is passing under this bridge on Northern Pacific First Subdivision.
- X30 At Selleck the Cascade Timber Company's tracks may be used to a point 250 feet beyond the east switch. All movements must be made at restricted speed, looking out for engines and cars of the Cascade Timber Company. The normal position of the switch leading to the Cascade Timber Company track is for their train and must be left in normal position after being used. Deraill is installed on west end of Northern Pacific siding and deraill on Cascade Timber Company's track 1000 feet west of west yard switch.

SEVENTH SUBDIVISION

- X31 In addition to those designated in time-table, standard clocks are located in Tide Flats Yard Office, Train Dispatcher's Office, Roundhouse Office, Tacoma, and Roundhouse Office, Seattle.
- X32 At Mineral, trains other than those displaying signals for a following section may register by register ticket.
- X33 At Mineral, the normal position of the crossing gates over the West Fork Logging Company crossing is for movements on the CMStP&P tracks.
- X34 Manually controlled crossing signals are in use at D Street, Tacoma. Speed restriction over the crossing is 10 miles per hour. Movement on team track over D Street must be protected by a member of the crew taking a position on the crossing to warn highway traffic of approaching trains.
- X35 When shoving cars over highway crossings on Kosmos Logging Line between Morton and Interchange Track, trains must come to a full stop and flag the crossing. During the night the crossing floodlight must be lighted for all trains while passing over crossing.
- X36 Eastward trains and engines on 7th Subdivisions moving between Hillsdale and Tacoma must make full stop before passing stop board located just west of C Street.

NINTH SUBDIVISION

- X37 At Skookumchuck, the normal position of the crossing gates over the Weyerhaeuser Timber Company crossing, located 1.6 miles east of the station, is for movements on the CMStP&P tracks.

TENTH SUBDIVISION

- X38 In moving over main track between Chehalis Junction and CCC interchange track at Chehalis, trains and engines should proceed expecting to find cars on this track.
- X39 At Chehalis, the normal position of the crossing gates over the N. P. crossings is for movements on the CMStP&P tracks.

ELEVENTH SUBDIVISION

- X40 At Bellingham, the normal position of the crossing gates over the crossing of the G. N. track in the yard, is for movements on the G. N. track.
- X41 When there is a passenger train at the Great Northern station at Bellingham, trains handling logs at this location will stop, and will not pull by or move until after the passenger train has departed.

TROLLEY SECTION SWITCHES

At stations where substations are located the air gaps are near substations, and the switches are located in the substations. At other stations switches are located near each end of siding or yard except:

Othello, west switch.....	825' west of H. B.
Anson, west switch.....	1500' west of H. B.
Corfu, west switch.....	2075' west of H. B.
Switch No. 8.....	Between Corfu and Beverly
Tunnel 45.....	1550' east of tunnel
Ellensburg, west switch.....	2575' west of H. B.
Thorp, west switch.....	1975' west of H. B.
Tunnel 47 east end.....	325' east of tunnel
Tunnel 47 west end.....	500' west of tunnel
Switch No. 31, 7 miles west of Cle Elum.....	4.7 miles east of Easton
Keechelus snowshed, east end.....	325' east of shed
Keechelus snowshed, west end.....	1325' west of shed
Bandera, west switch.....	1275' west of H. B.
Garcia, west switch.....	2925' west of H. B.
Renton, switch No. 60.....	250' east of double track H. B.
Black River.....	800' south of "Y"
Black River, No. 101 controlling inbound track.....	650' north of O-W tower
Black River, No. 102 controlling inbound track.....	650' north of O-W tower
Argo, No. 105 controlling inbound P. C. track, at P. C.-O-W crossover	
Argo, No. 106 controlling outbound P. C. track at P. C.-O-W crossover	
Argo, No. 107 controlling inbound O-W track, at P. C.-O-W crossover	
Argo, No. 108 controlling outbound O-W track, at P. C.-O-W crossover	
Seattle Psgr. Station, No. 109 controlling inbound track.....	About 0.4 mi. south of station
Seattle Psgr. Station, No. 110 controlling outbound track.....	About 0.4 mi. south of station
Switches Nos. 105, 106, 107, 108, 109, and 110 can be opened under load if necessary for protection of persons or property.	
Kent, east switch.....	1325' east of H. B.
Kent, west switch.....	1375' west of H. B.
Benroy, east switch.....	1550' east of H. B.
Sumner, west switch.....	No air gap or switch
North Puyallup, east switch.....	1450' east of H. B.

WATCH INSPECTORS

National Railway Time Service Co.....	Chief Inspectors 58 East Washington Street Chicago, Ill.
Othello.....	Pacific Watch Co.
Ellensburg.....	304½ No. Pearl St., Chas. E. Dickson
Cle Elum.....	218 E. First St., Morrow Jewelers
Seattle.....	414 Pike St., Weisfield & Goldberg, Inc.
Seattle.....	1323 Third Ave., H. Raphael
Tacoma.....	1105 Broadway, A. A. Mierow
Everett.....	2934 Colby Ave., O. P. Nelson
Enumclaw.....	A. C. Melness
Morton.....	F. A. Baker
Hoquiam.....	Fred Wetzel
South Bend.....	Halver Holte
Bellingham.....	1308 Cornwall Ave., E. H. Easton
Port Angeles.....	J. L. Coffey
Port Townsend.....	840 Water St., Walter S. Wisniewski
Longview.....	Hammond Jewelry Co.

R. W. BEAL.

C. P. MILES.

F. A. CHALK.

W. H. SMITH.

R. E. JOINER.

J. R. PIATT.

H. A. MOSHER.

H. L. HITCHCOCK.

Train Dispatchers.

T. E. CORBETT.

Chief Dispatcher 13th Subdivision.

J. W. CORBETT.

Chief Dispatcher 1st to 12th Subdivisions, Incl.

E. G. TALLMADGE.

C. W. McMILLAN.

Traveling Engineers and
Assistant Trainmasters.

S. E. HERZOG.

Assistant Trainmaster.

J. O'DORE.

Trainmaster.